
Connecting Strength

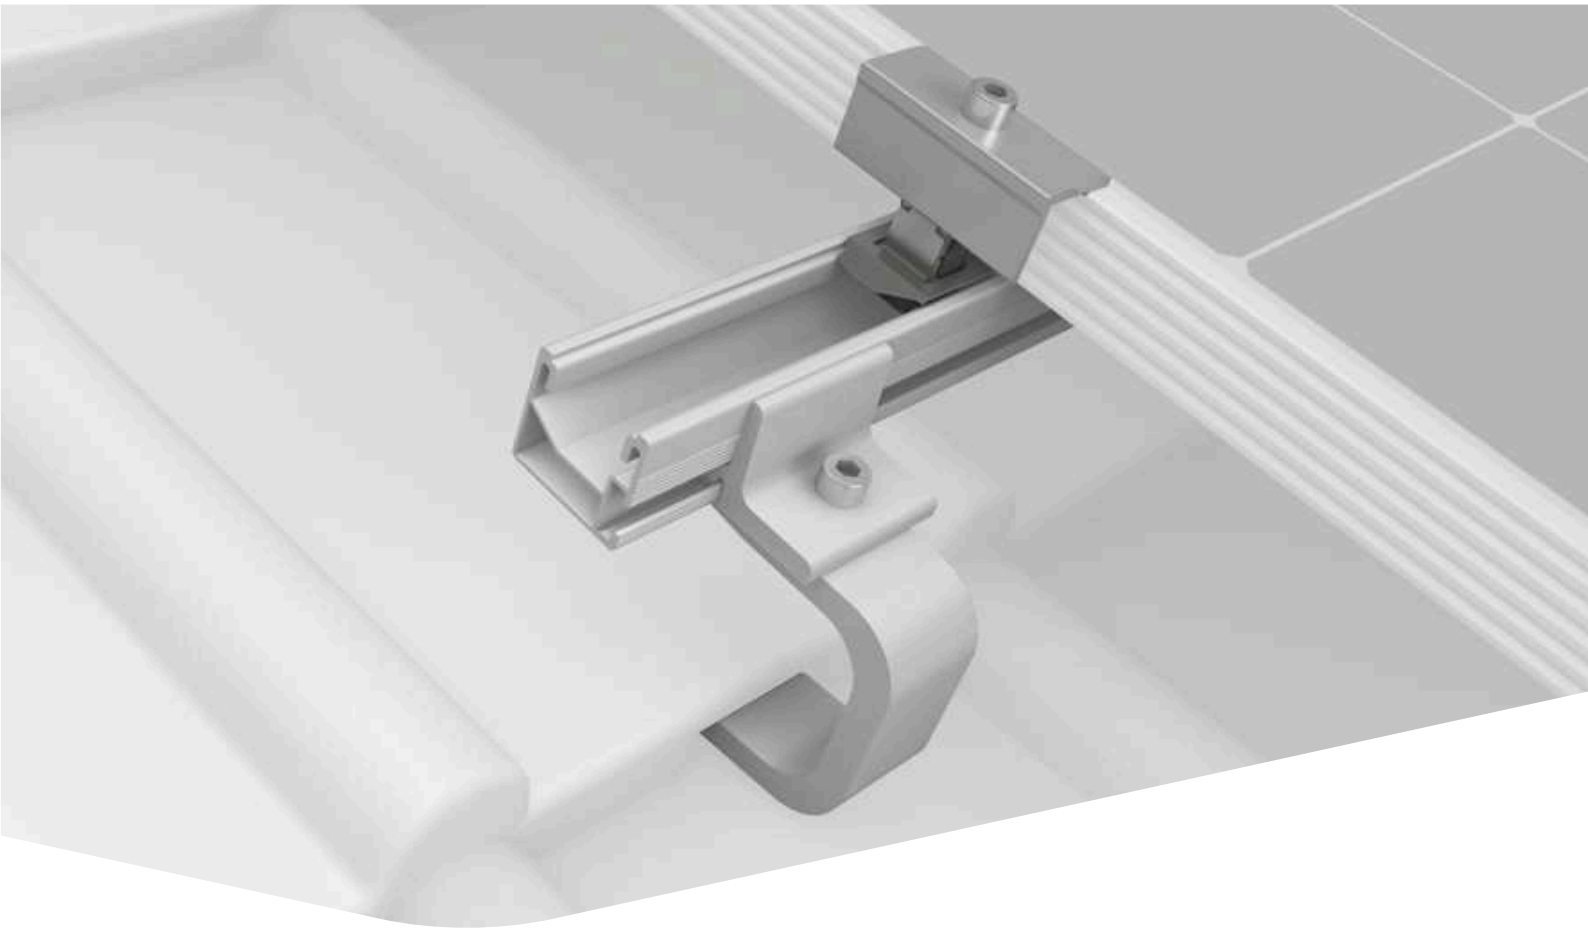

Assembly instructions

K2 SingleRail System

with roof hooks

Content


- **Tools overview** 3
- **General safety information** 4
- **The following guidelines apply** 5
  - Planning with K2 Base 5
  - Roof requirements 5
  - Important mounting instructions 5
- **Components** 6
  - Base components 6
  - SingleBoards 8
  - Height compensation and underlay 9
- **Compatible roof hooks** 10
  - SingleHook 3S 10
  - SingleHook 3S Light 10
  - SingleHook 3S Long 11
  - SingleHook 4S 11
  - SingleHook 1.1 12
  - SingleHook Alpin 12
  - SingleHook 2 13
  - SingleHook Vario 13
  - SingleHook Slate for slate 14
  - L-Adapter for further roof hooks 14
- **Assembly** 15
  - Notes on rooftop insulation 15
  - Portrait 16
  - Thermal separations 19
  - Landscape with two rail layers 20
  - Thermal separations for 2-layer rails 22
  - Obstructions / roof edge: Use of SingleBoards 23
  - Compensate and underlay height differences 25
  - Attach BlackCover and EndCap 26
- **Installation on slate roofs** 27
  - SingleHook Slate on solid boarding 27
  - SingleHook Slate on battens 28
- **Notes** 29

Quality tested - several certifications

K2 Systems stands for secure connections, highest quality and precision. Our customers and business partners have known that for a long time. Independent institutes have tested, confirmed and certified our capabilities and components.

Please find our quality and product certificates under:
k2-systems.com/en/technical-information

Tools overview





TX25/40




SW 13 mm



6 mm



8,5 mm





6 mm




6 - 30 Nm
(4.5 - 22.2 lb-ft)



6 mm




13 mm



≥ 3.0 m



≥ 6.0 m



General safety information

Please note that our general mounting instructions must be followed at all times and can be viewed online at k2-systems.com

- The equipment may only be installed and operated by qualified and adequately trained installers.
- Prior to installation, ensure that the product complies with on-site static loading requirements.
  For roof-mounted systems, the roof load-bearing capacity must always be checked.
- National and local building regulations and environmental requirements must be adhered to.
- Compliance with health and safety regulations, accident prevention guidelines and applicable standards is required.
  - Protective equipment such as safety helmet, boots and gloves must be worn.
  - Roofing works must be in accordance with roofing regulations utilising fall protection safeguards when eaves height exceeds 3 m.
  - At least two people must be present for the duration of the installation work in order to provide rapid assistance in the event of an emergency.
- K2 mounting systems are continuously developed and improved and the installation process may thereby change at any time. Prior to installation consult our website at k2-systems.com/en/technical-information for up-to-date instructions.
  We can send you the latest version on request.
- The assembly instructions of the module manufacturer must be adhered to.
- Equipotential bonding/grounding/earthing between individual parts is to be performed according to country specific standards, as well as national laws and regulations.
- At least one copy of the assembly instructions should be available on site throughout the duration of the installation.
- Failure to adhere to our general safety and assembly instructions and not using all system components, K2 is not liable for any resulting defects or damages. We do not accept liability for any damage resulting in the use of competitor's parts. Warranty is excluded in such cases.
- German law shall apply excluding the UN Convention on CISG. Place of venue is Stuttgart. Our General Terms of Business apply.
- If all safety instructions are adhered to and the system is correctly installed, there is a product warranty entitlement of 12 years! We strongly recommend reviewing our terms of guarantee, which can be viewed at k2-systems.com/en/warranty-terms-and-conditions We will also send this information on request.
- Dismantling of the system is performed in reverse order to the assembly.
- K2 stainless steel components are available in different corrosion resistance classes. Each structure or component must be carefully checked for possible corrosion exposure.

The following guidelines apply

This system can be used without further testing by K2 Systems in the following standard conditions. The system is also suitable for higher requirements. However, if a value exceeds the standard conditions, please contact K2 Systems.

Planning with K2 Base

We recommend our free online software K2 Base for the planning. In five steps, you can plan the right assembly system and get a construction recommendation, parts list and the structural analysis report. Simply register and start planning: base.k2-systems.com

Roof requirements


- The sufficient holding force of the roof covering at the support or substructure must be ensured on site.
- Roof pitch of 5 - 75°
- Sufficient load reserves to support the PV system.


Important mounting instructions

- On-site general standards and regulations for lightning protection must be observed and consultation with a specialist to create a lightning protection concept is recommended (use lightning protection clamp if necessary).
- Please refer to our Handbook "Wood Screw Fixation of K2 Roof Hooks" for the installation of all roof hooks k2-systems.com/en/handbook-roof-hooks
- We recommend a thermal separation after maximum of 17.6 m.
- A minimum mounting distance of 50 mm from the end of the rail / rail joint to the module frame.
- Rail cut SingleRail ≥ 700 mm
- Tightening torque for all module clamps 16 Nm
- The SingleRail 36/50 RailConnector must always be positioned between two roof hooks; meaning, a cantilever extension at the rail edge outside the last roof hook is not permitted.
- For manufacturer information regarding clamps see the manufacturing module data sheet.
- In order to avoid damage under high snow loads, replace the clay/concrete roof tile with metal roof plate or sheet metal replacement tile under the bracket of the roof hook (exception SingleHook 2).
- Do not step on roof hooks or rails, as these are not climbing assists.
- Sizing and positioning of the wood screws are subject to the relevant regulations.
- In the case of pressure-soft rooftop insulation, especially that made of mineral fibres, care must be taken to ensure a suitable spacer screw connection of the counter batten to the rafter.
- The following applies to all insulation materials: With counter-batten thicknesses greater than 40 mm, the roof hooks can also be fastened exclusively into the counter-batten if it is sufficiently shear- and pressure-resistant.

Components

Base components

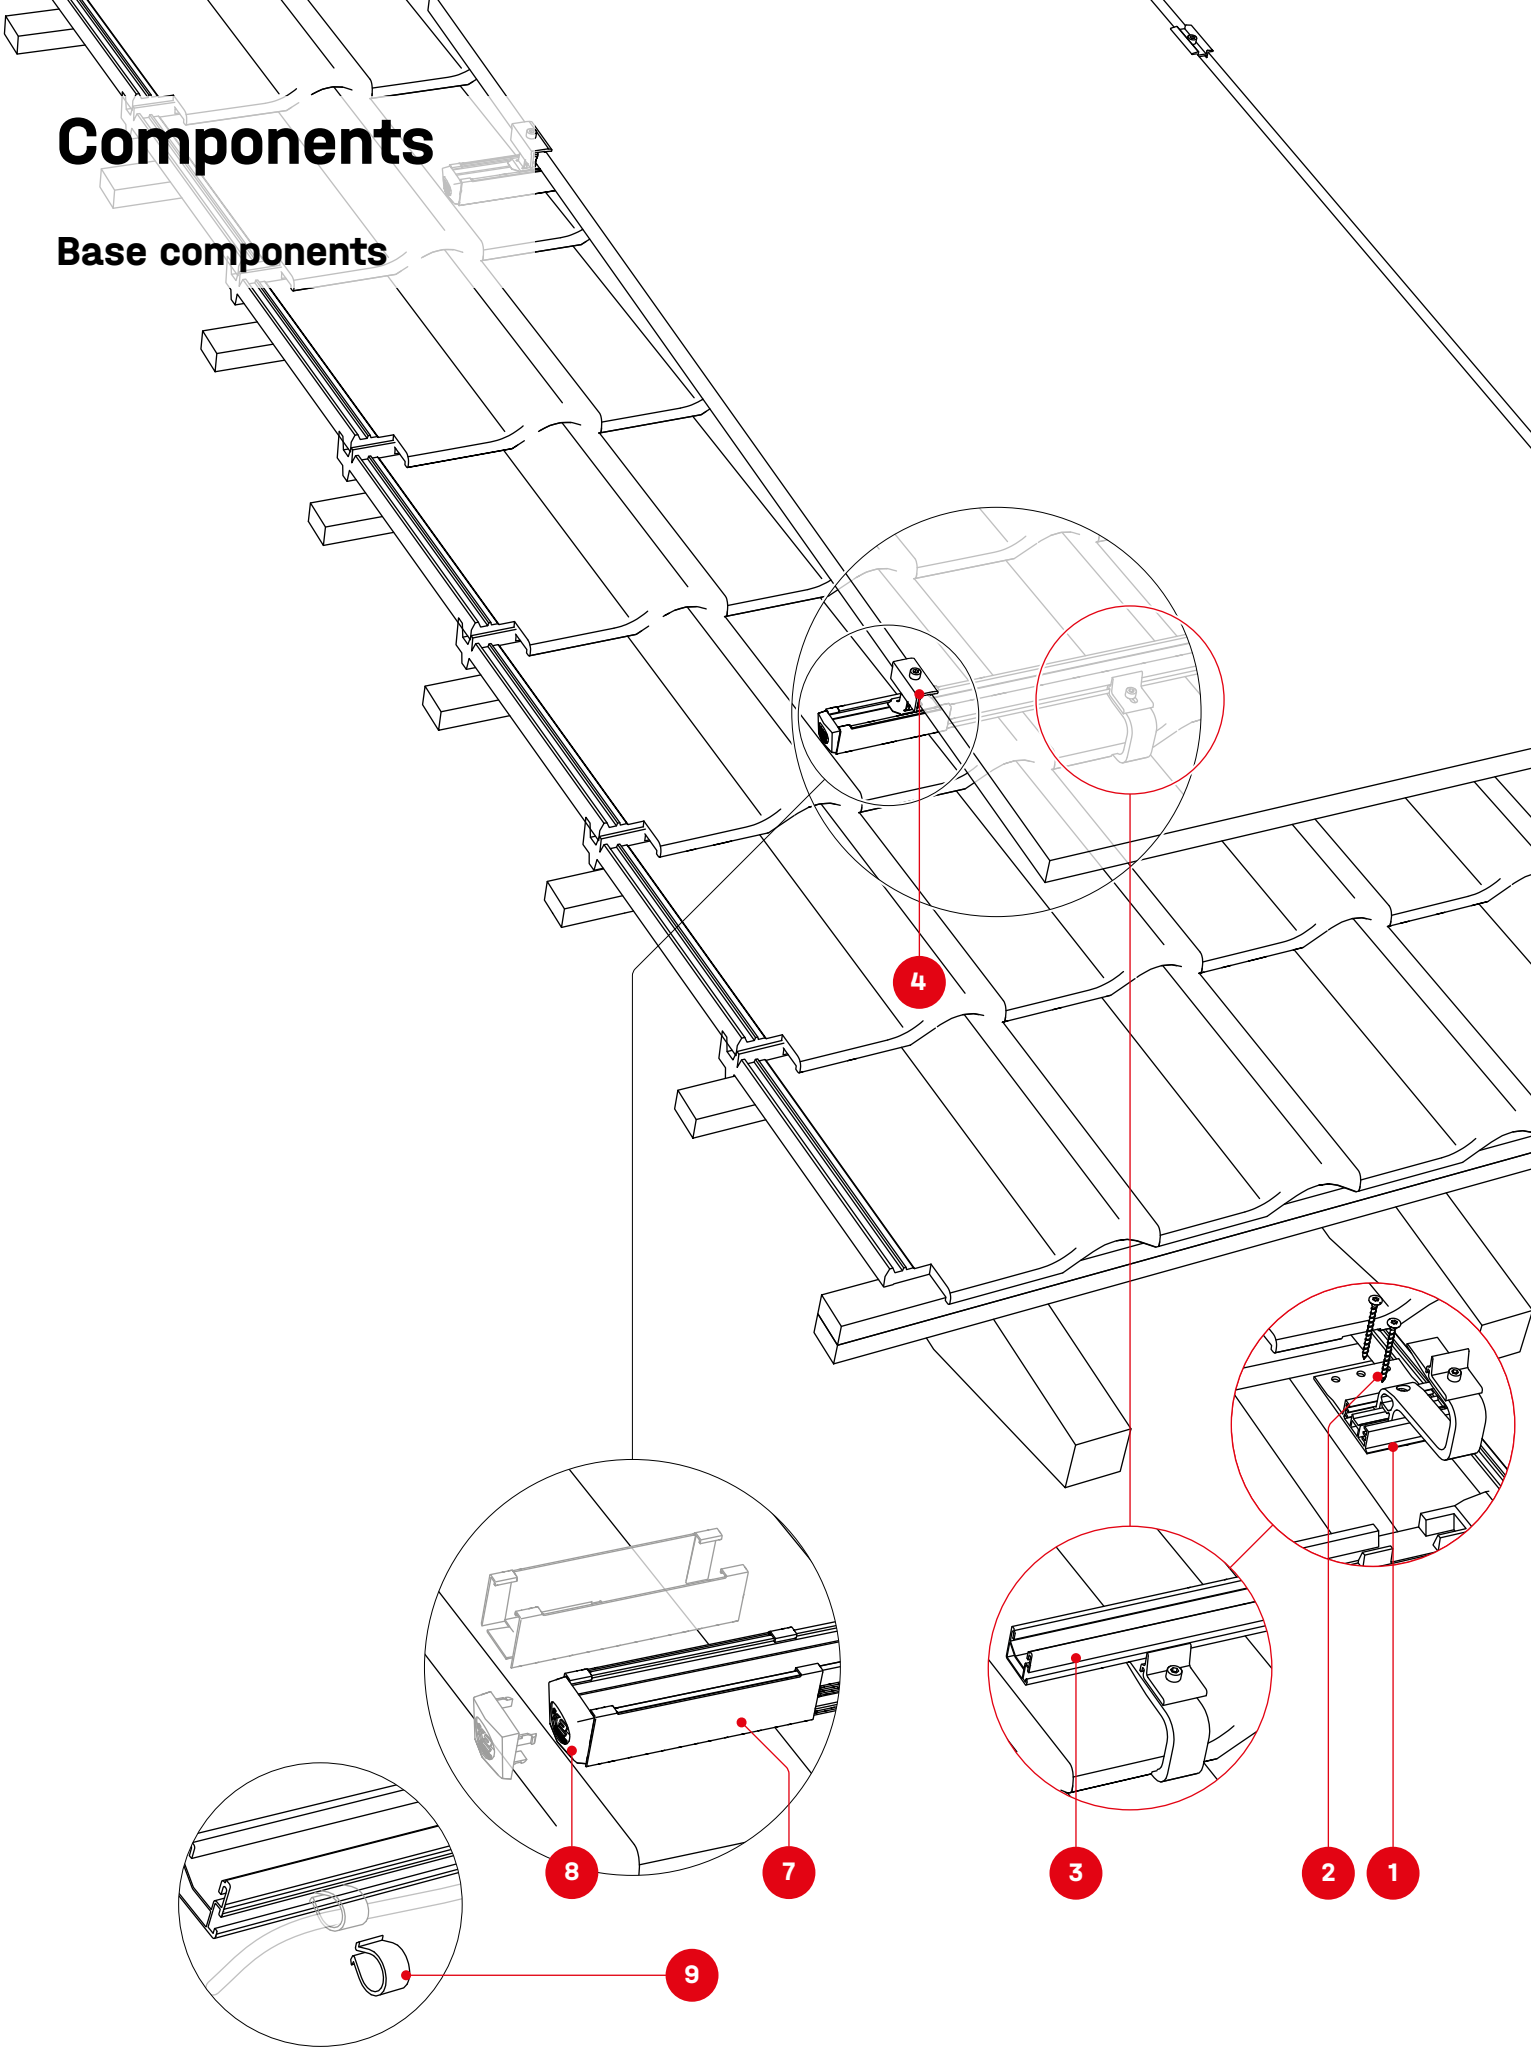

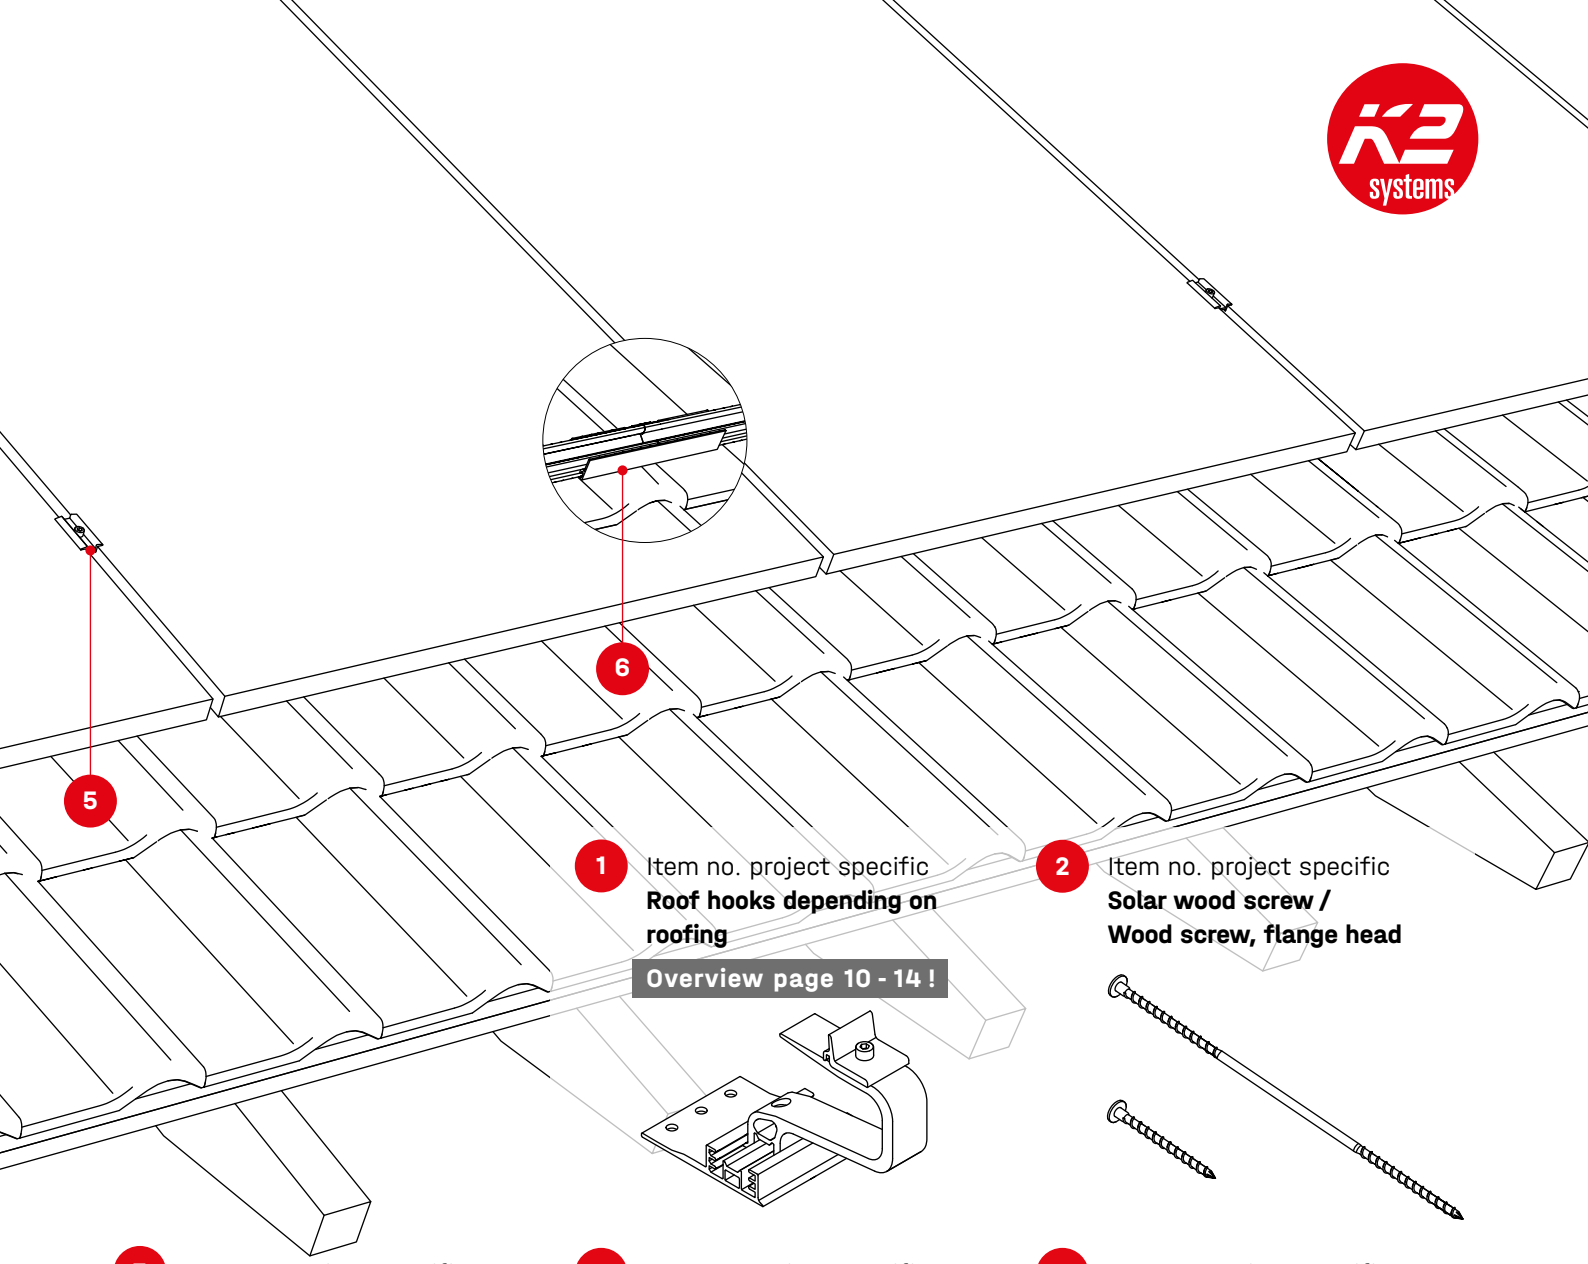


1 Item no. project specific
Roof hooks depending on roofing


Overview page 10 - 14 !

2 Item no. project specific
Solar wood screw / Wood screw, flange head

3 Item no. project specific
SingleRail 36, 50 or 36 Light



4 Item no. project specific
Module end clamps




K2 Clamp EC
25 - 40



XS Clamp EC
30 / 33 / 35

5 Item no. project specific
Module middle clamps




K2 Clamp MC
25 - 40




XS Clamp MC
30 / 33-35

6 2003605/2001976
SingleRail 36/50 RailConnector


SingleRail 36/50 Connector Set

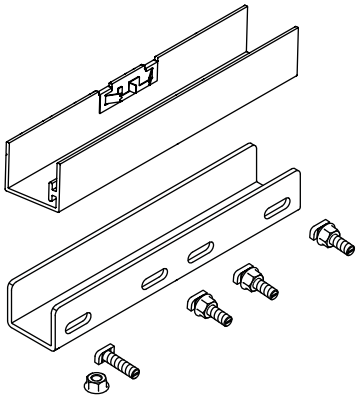

7 1004767/2004911
EndCap SingleRail 36/50



8 2003523/2002907
BlackCover SingleRail 36/50

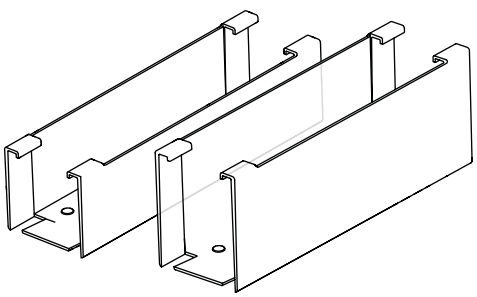


9 1005394
Omega Cable Clip




Components

SingleBoards


1 2001972 / 2002935
SingleBoard 3S/4S / SingleBoard

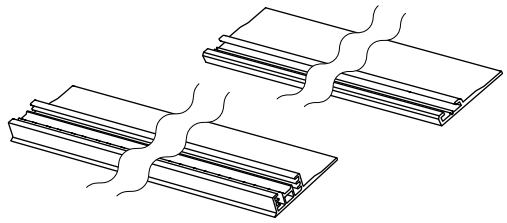


2 2002927 / 2003152
SingleBracket 4S / SingleBracket 1.1




Drilling specifications for SingleBoards

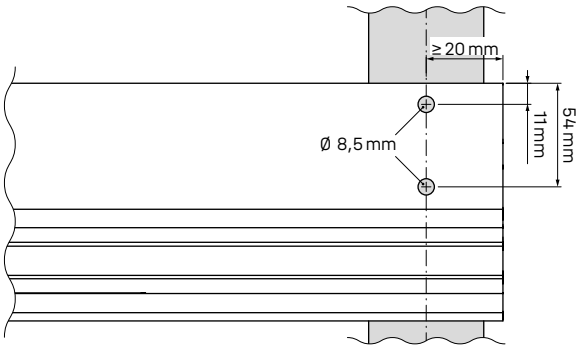


Height compensation and underlay


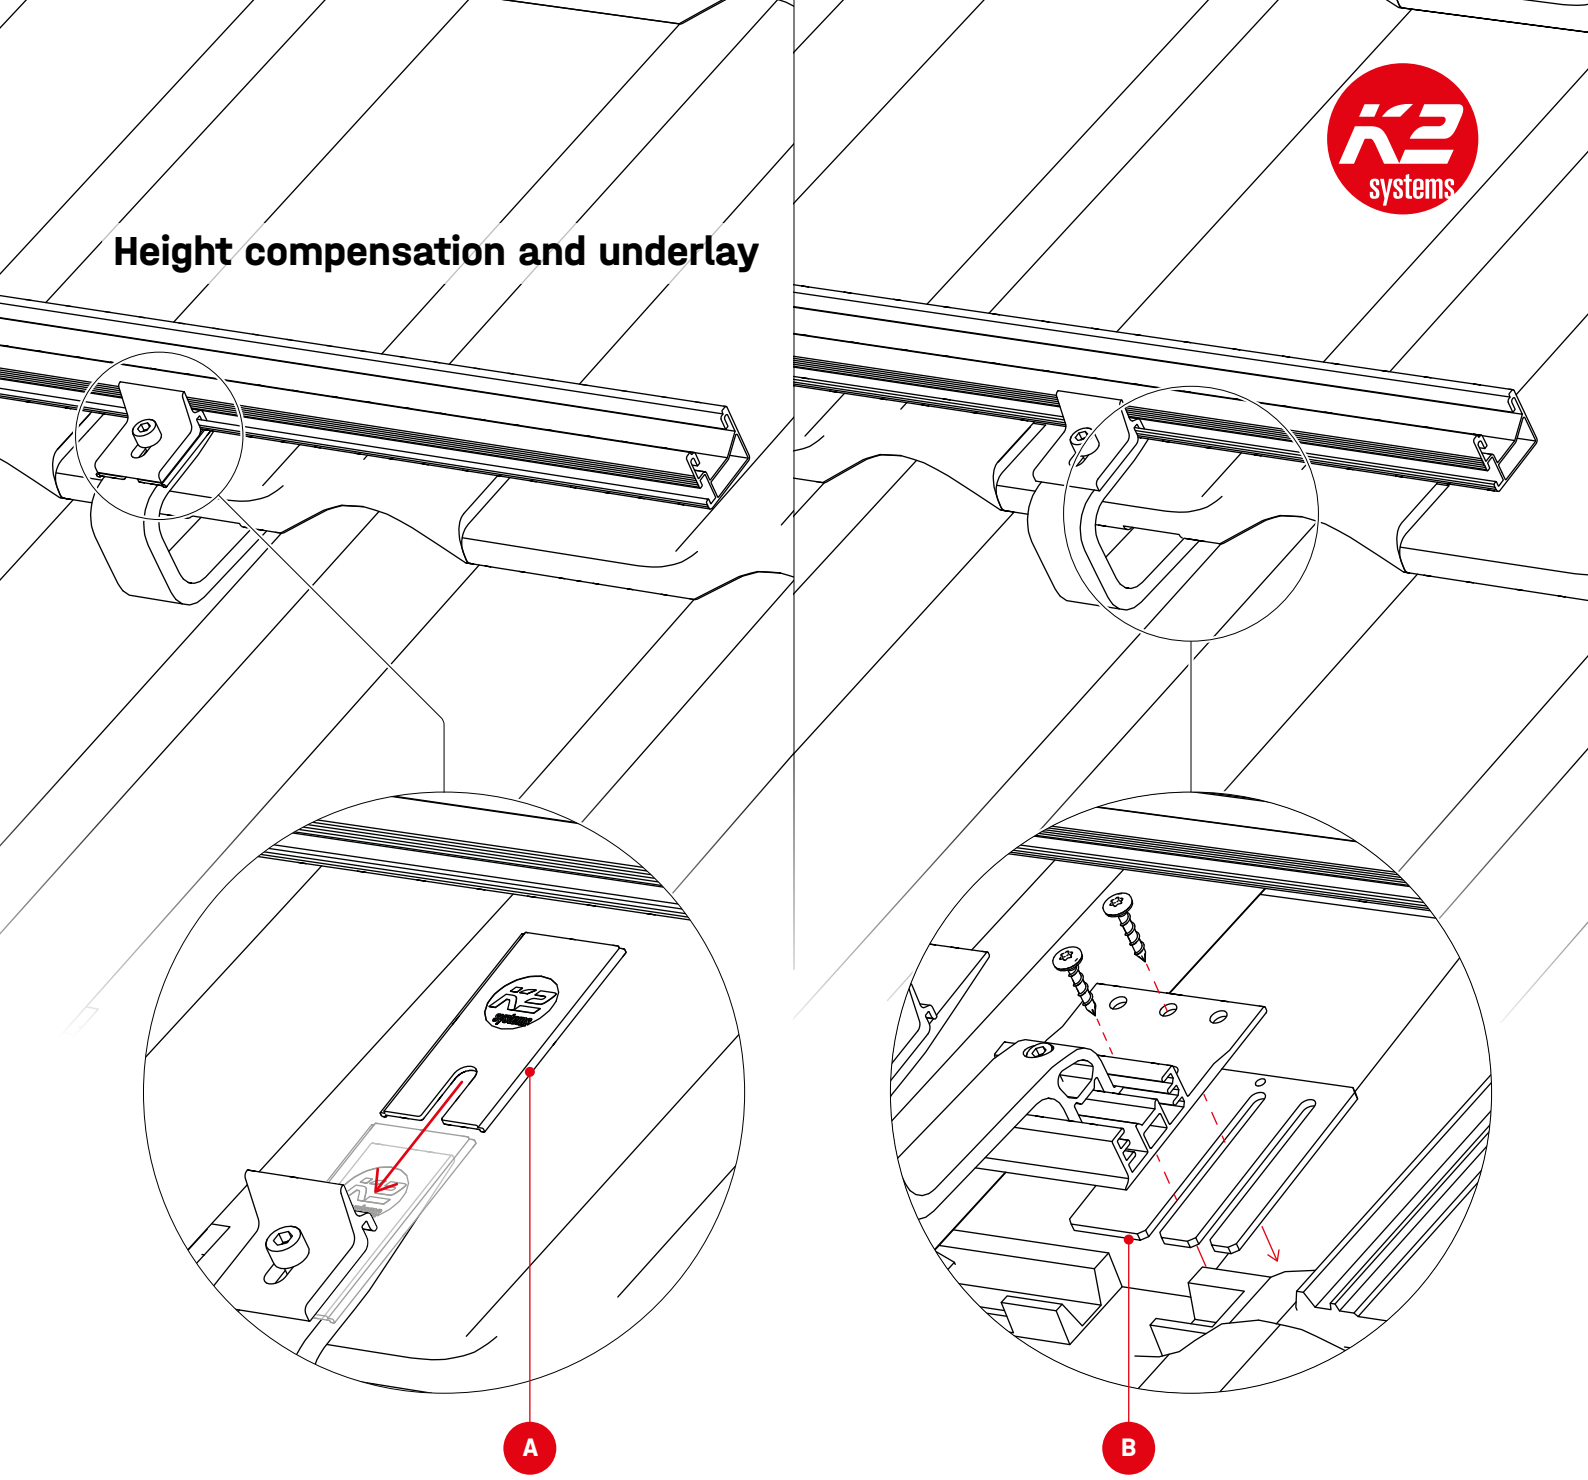


1002361
Distance Pad
2 mm

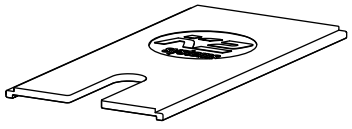

2002332
Roof Hook Height Compensator
4 mm

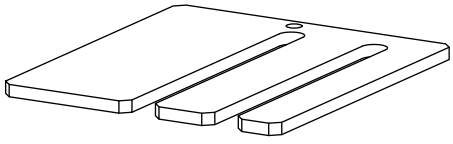


SingleHook 3S/4S/3S Long 	●	●
SingleHook 1.1/Vario/Alpin 	○	●


● Compatible ○ Not Compatible

Compatible roof hooks


SingleHook 3S · 2003215

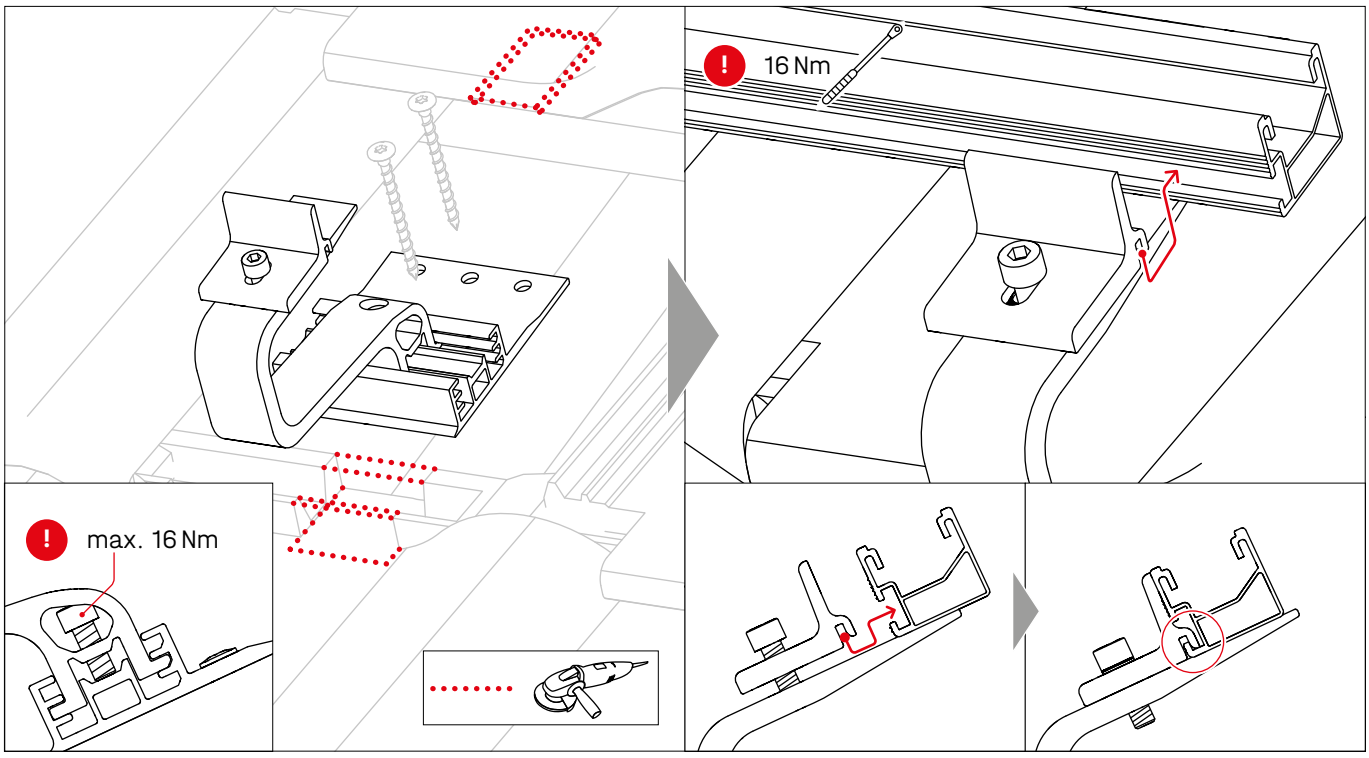


SingleHook 3S Light · 2004795

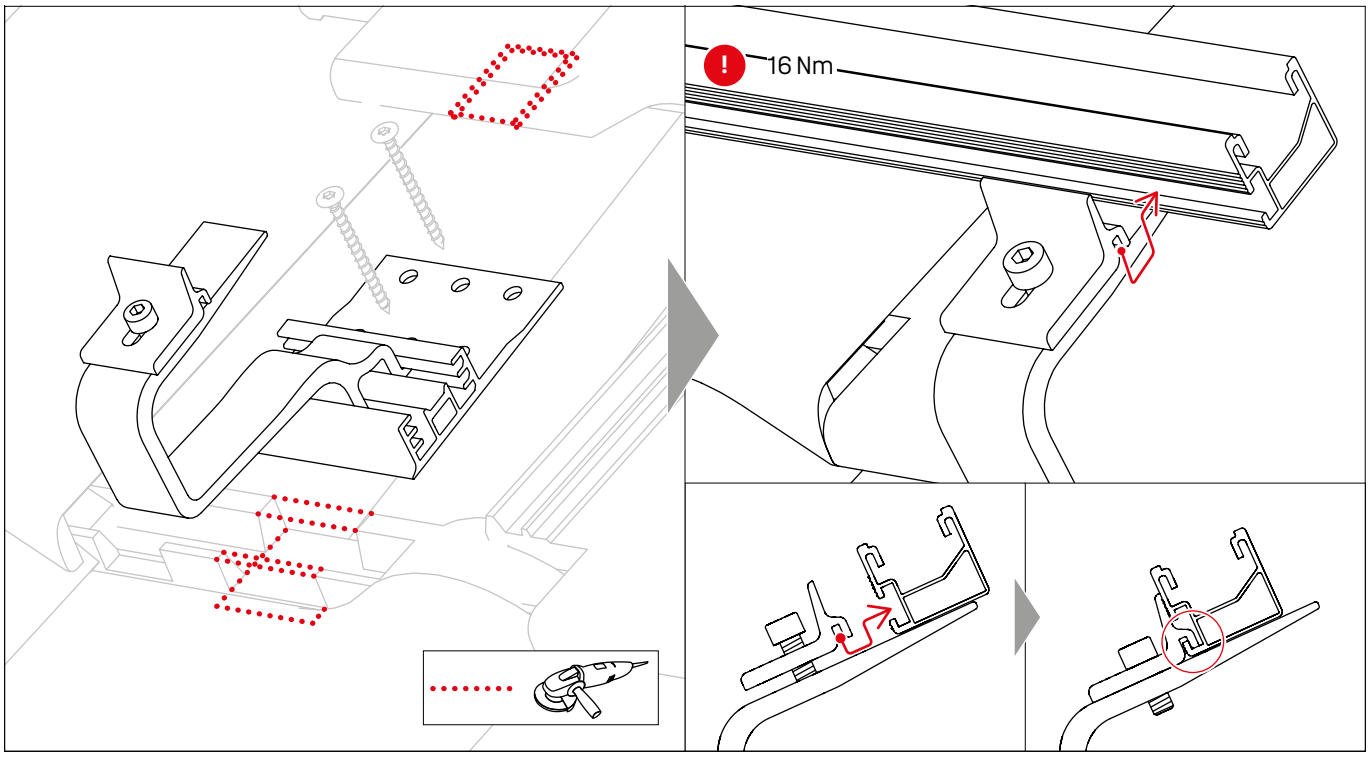


SingleHook 3S Long · 2004222

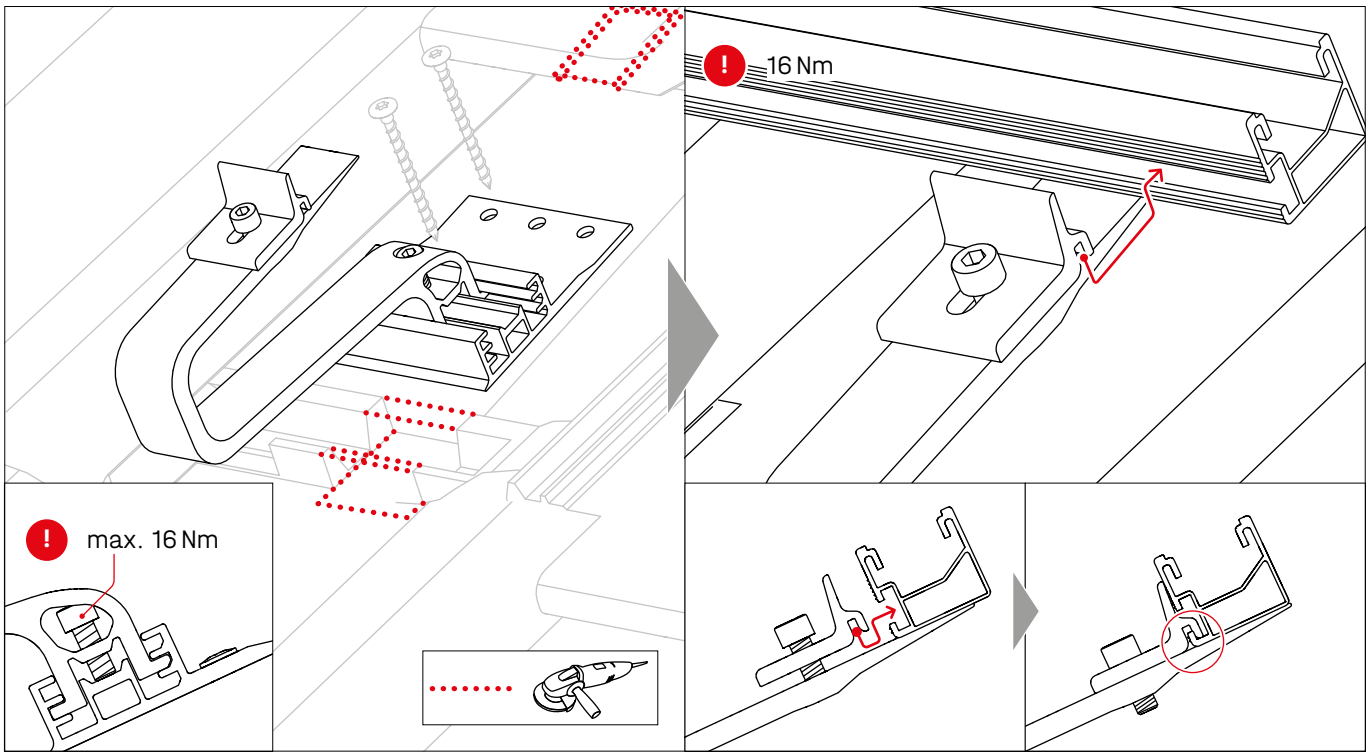


SingleHook 4S · 2003144

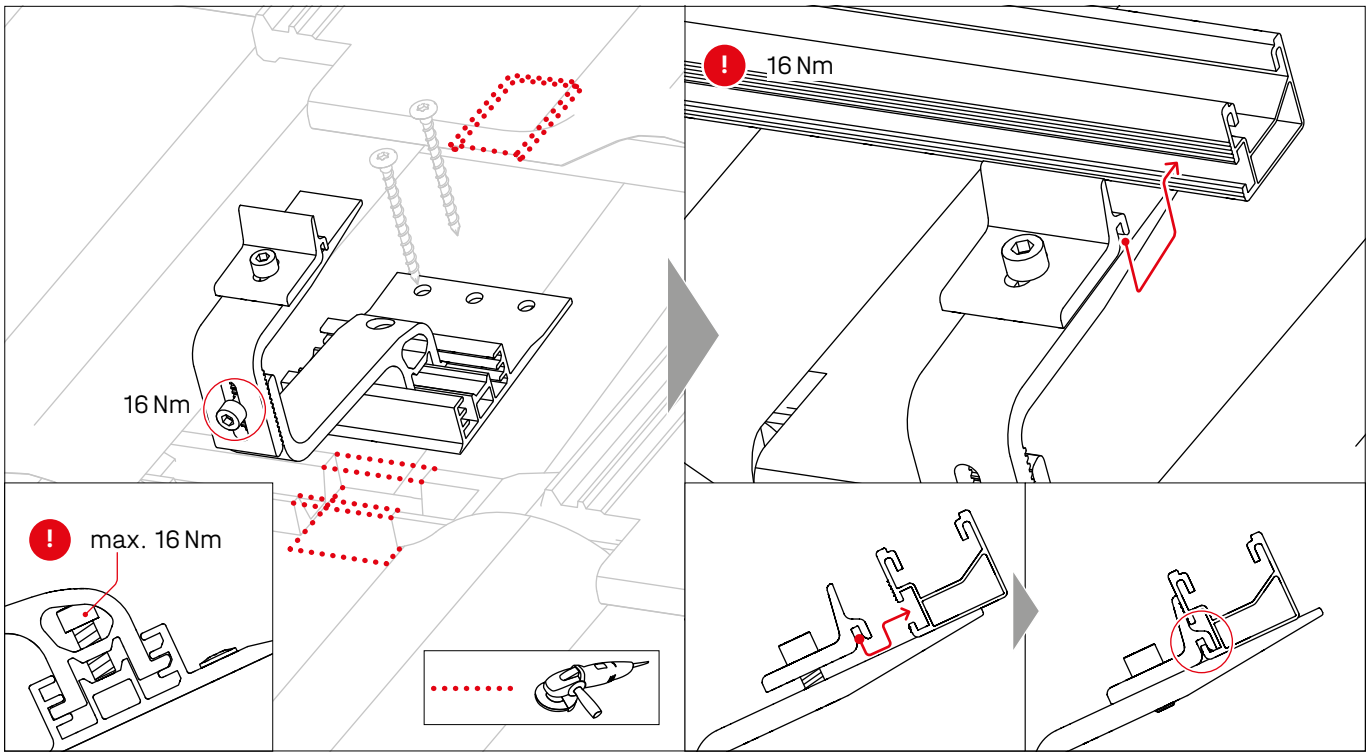


SingleHook 1.1 · 2001928

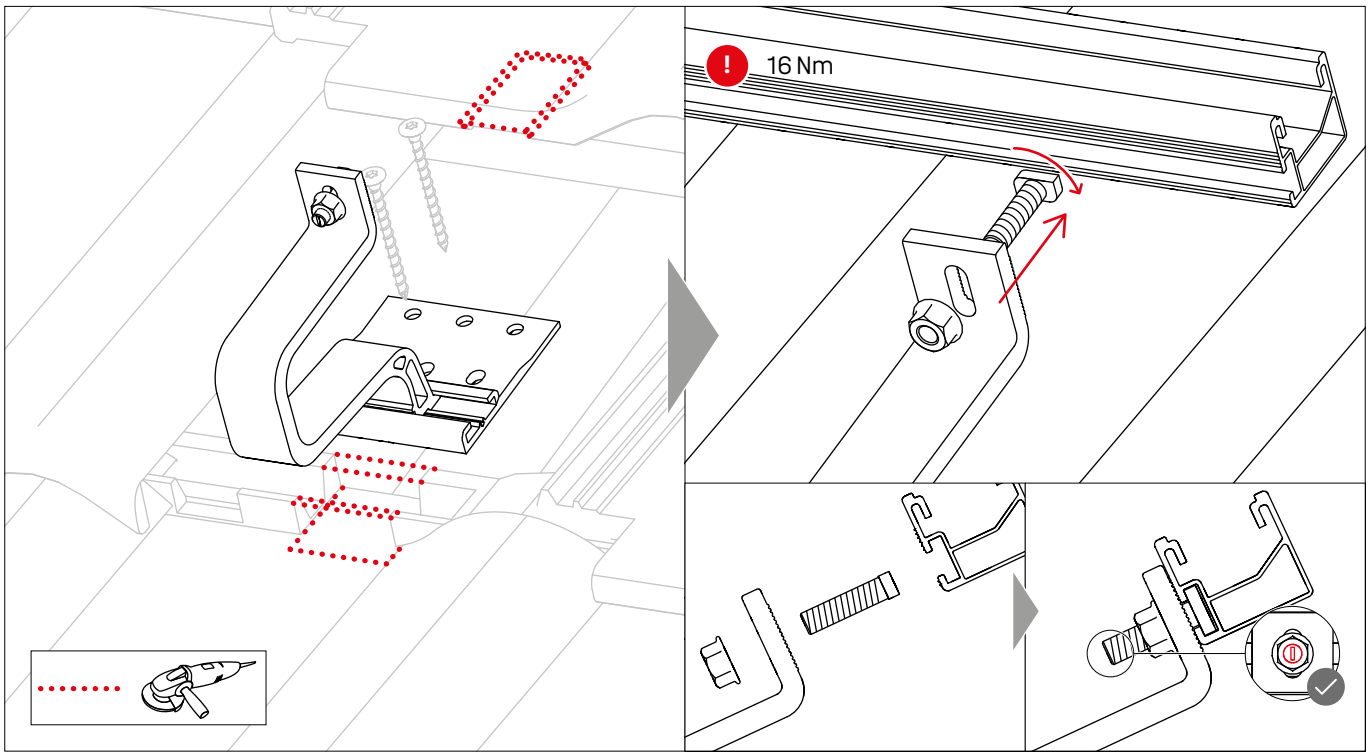


SingleHook Alpin · 2003155

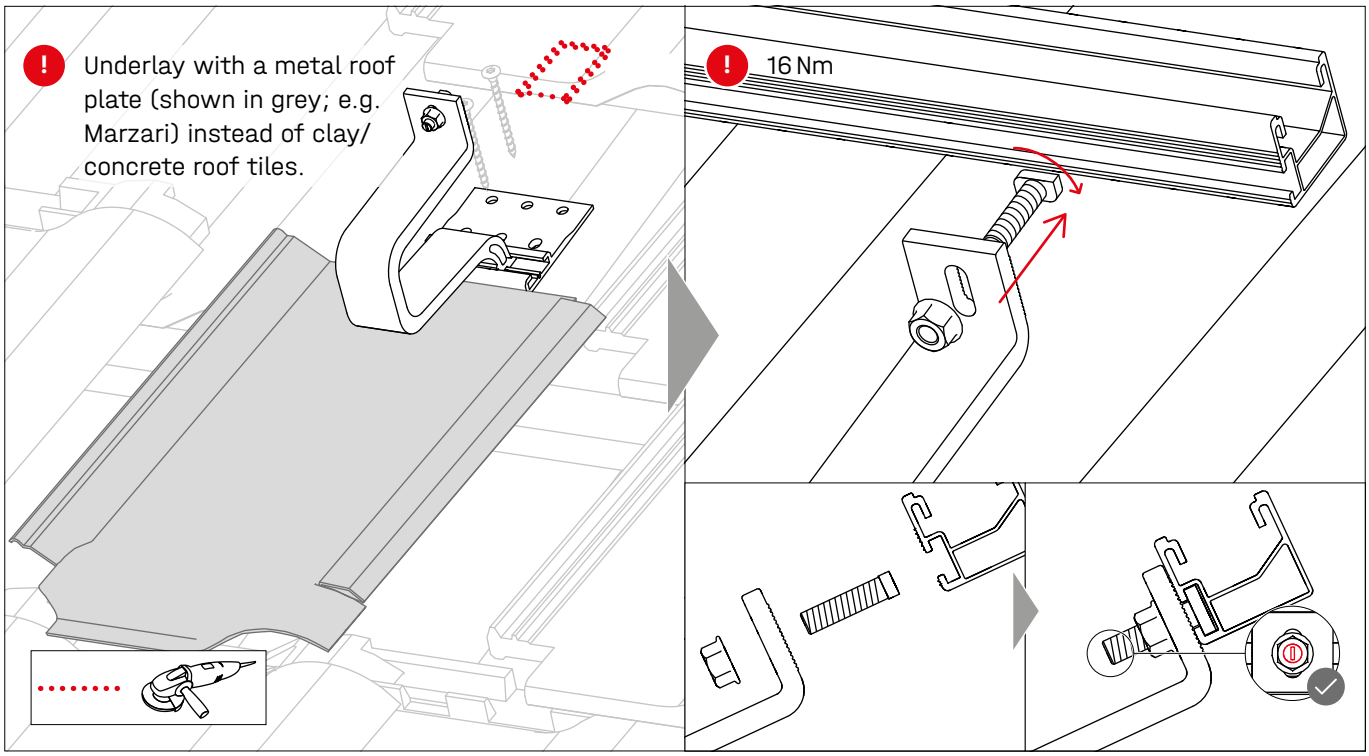


SingleHook 2 · 2003175

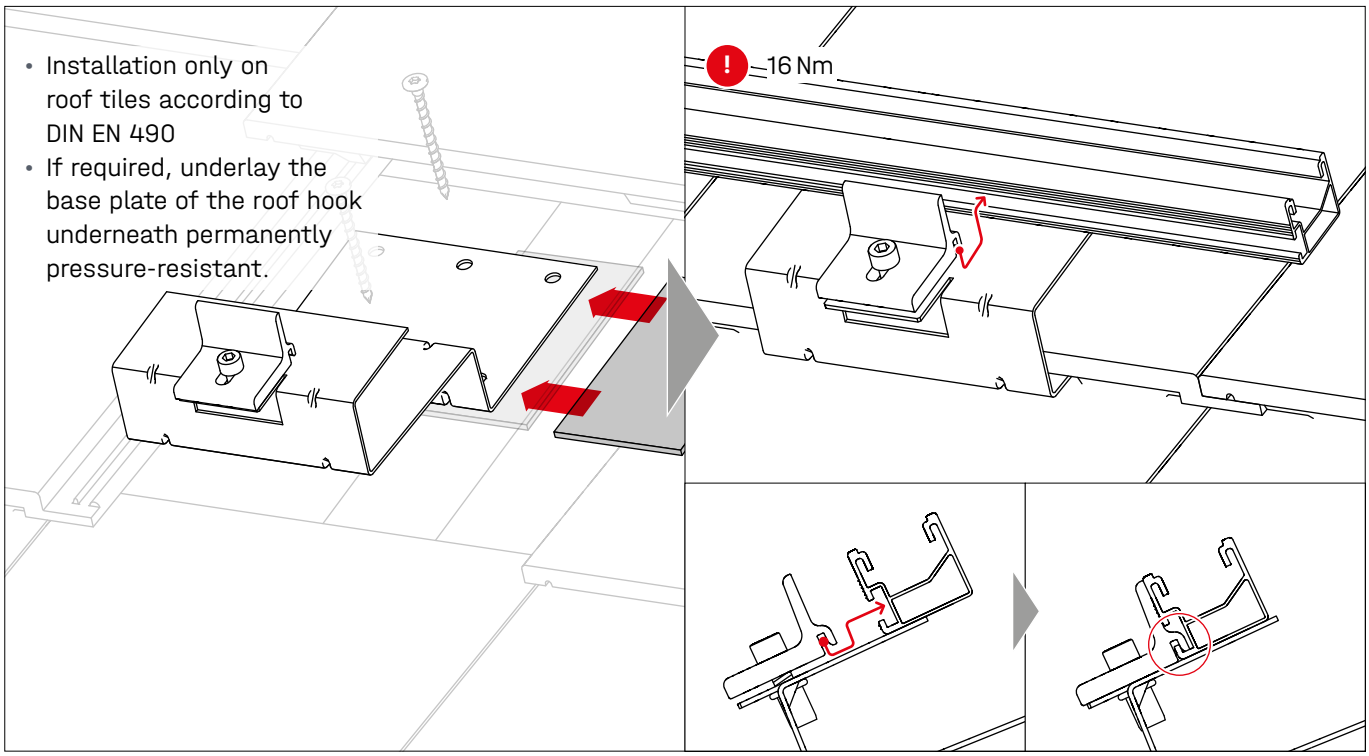

SingleHook Vario · 2002651

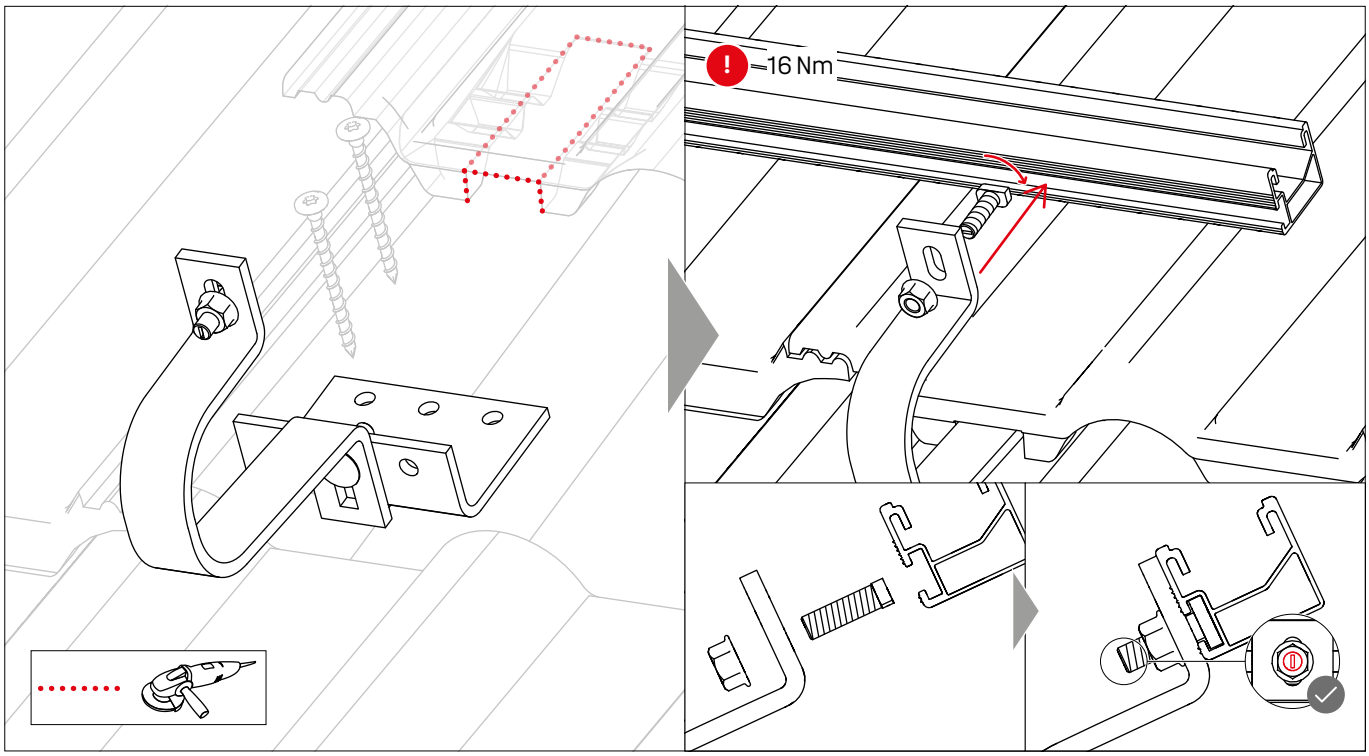


SingleHook Slate · 2005241

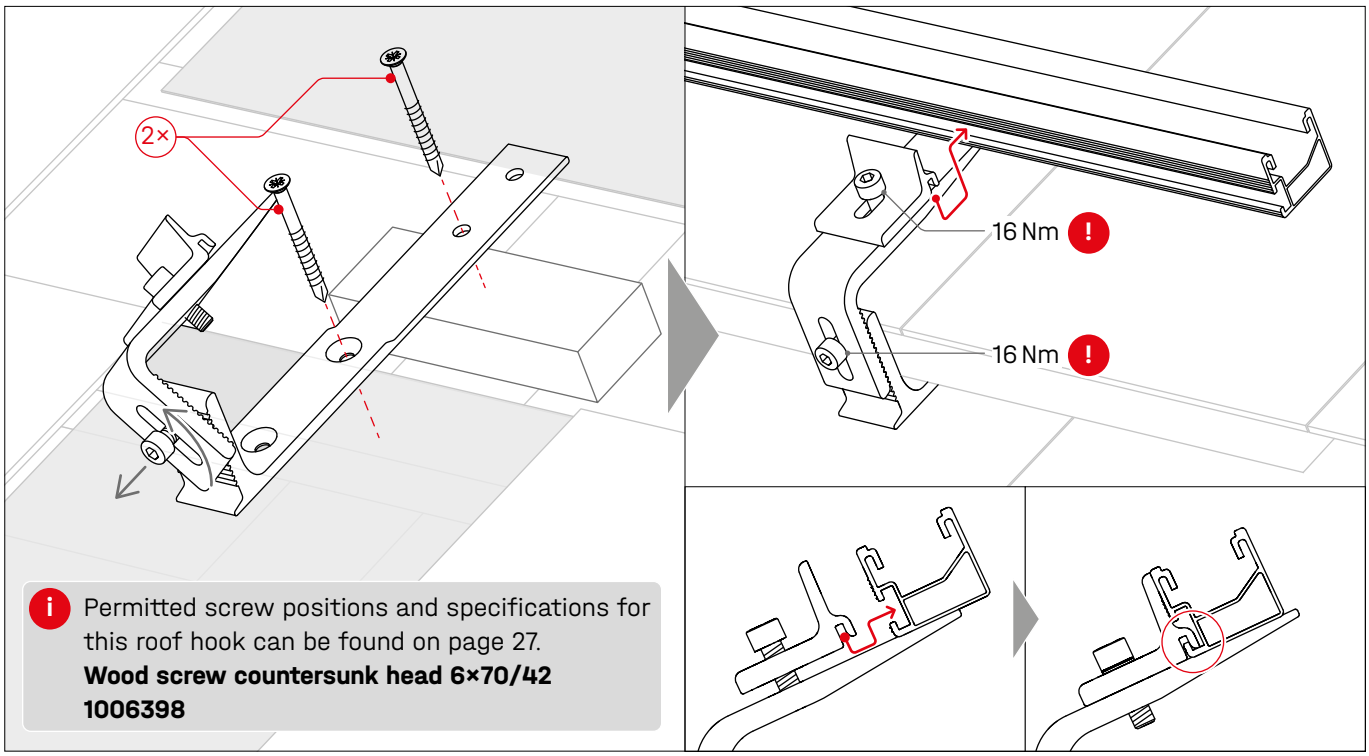


Permitted screw positions and specifications for this roof hook can be found on page 27.
Wood screw countersunk head 6×70/42
1006398


L-Adapter for further roof hooks · 2002683

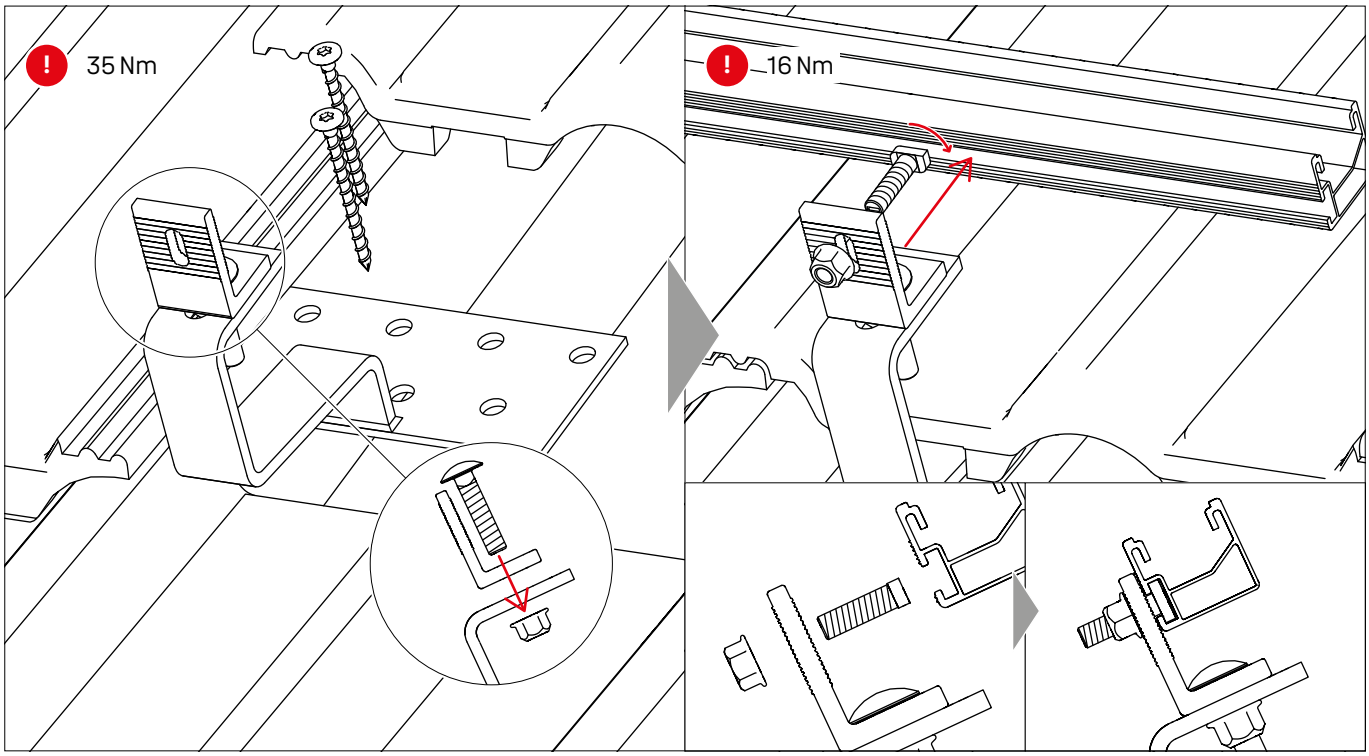

Assembly


Notes on rooftop insulation

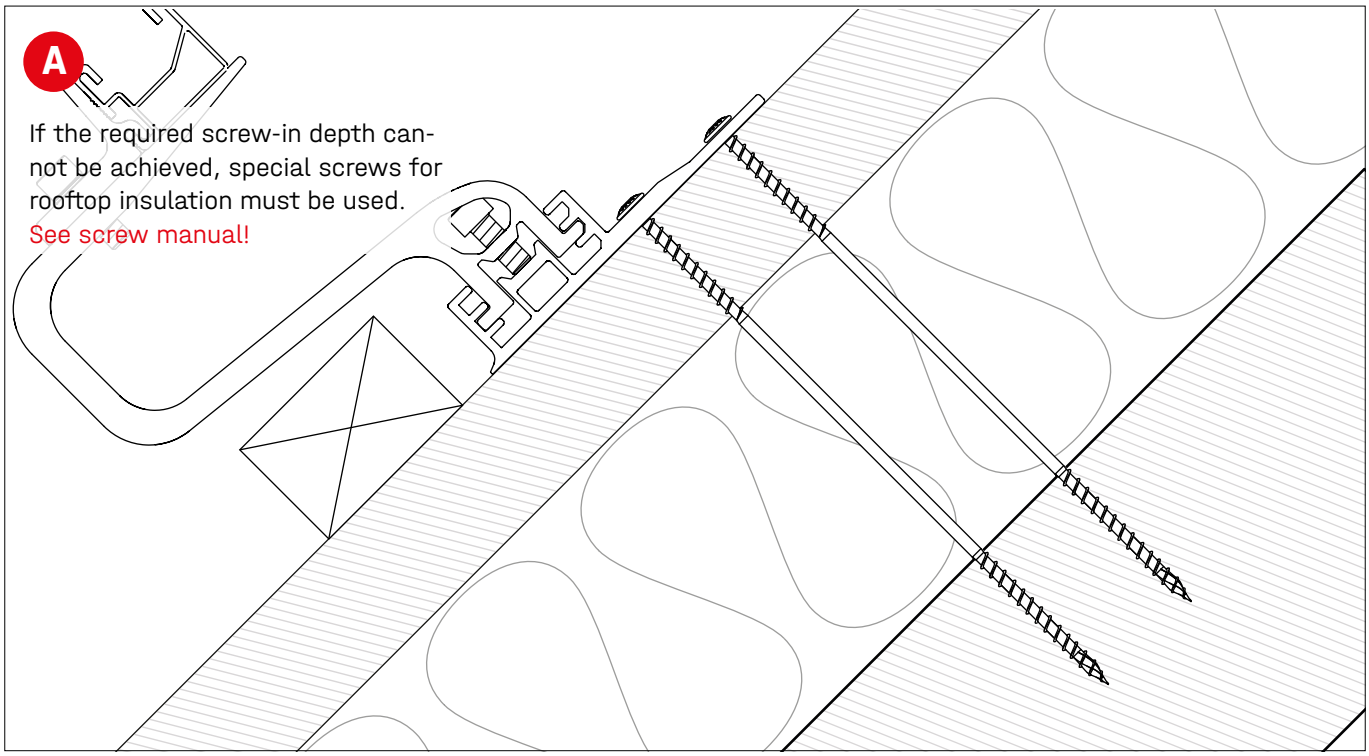


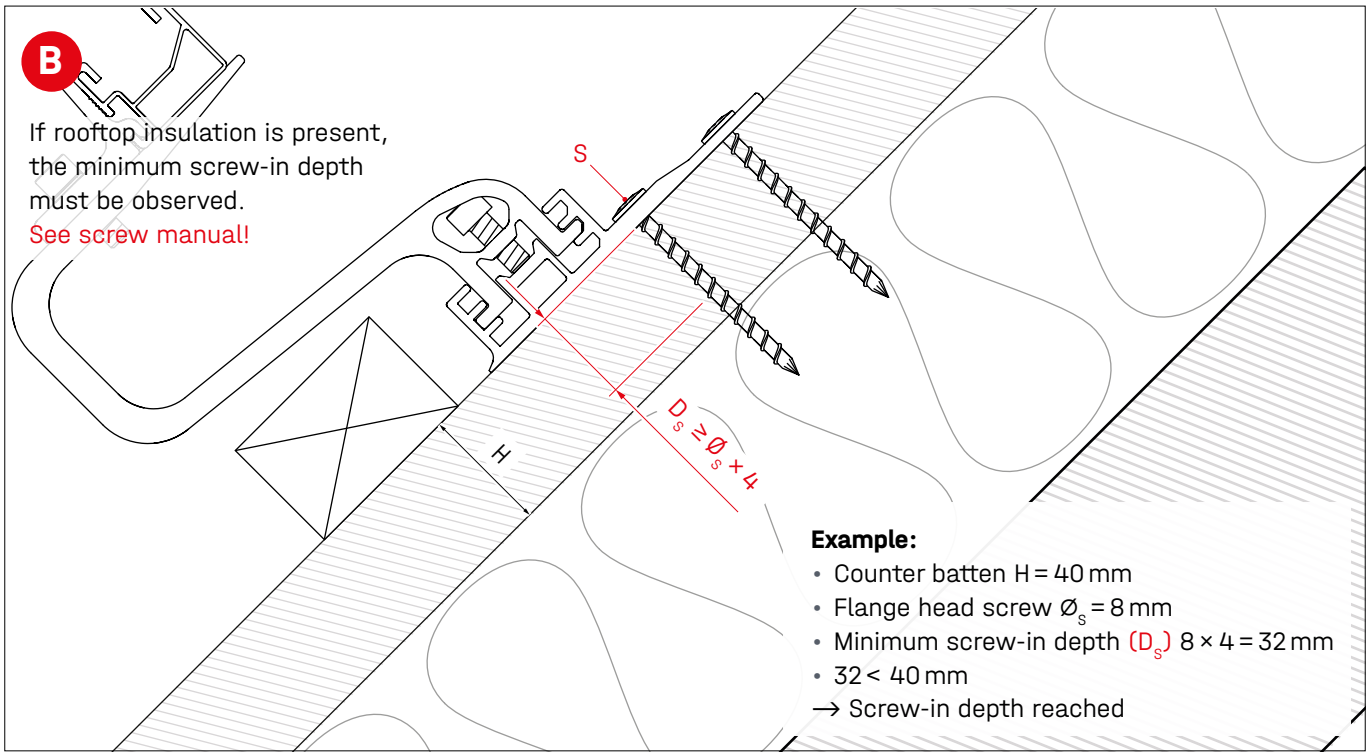


Assembly


Portrait

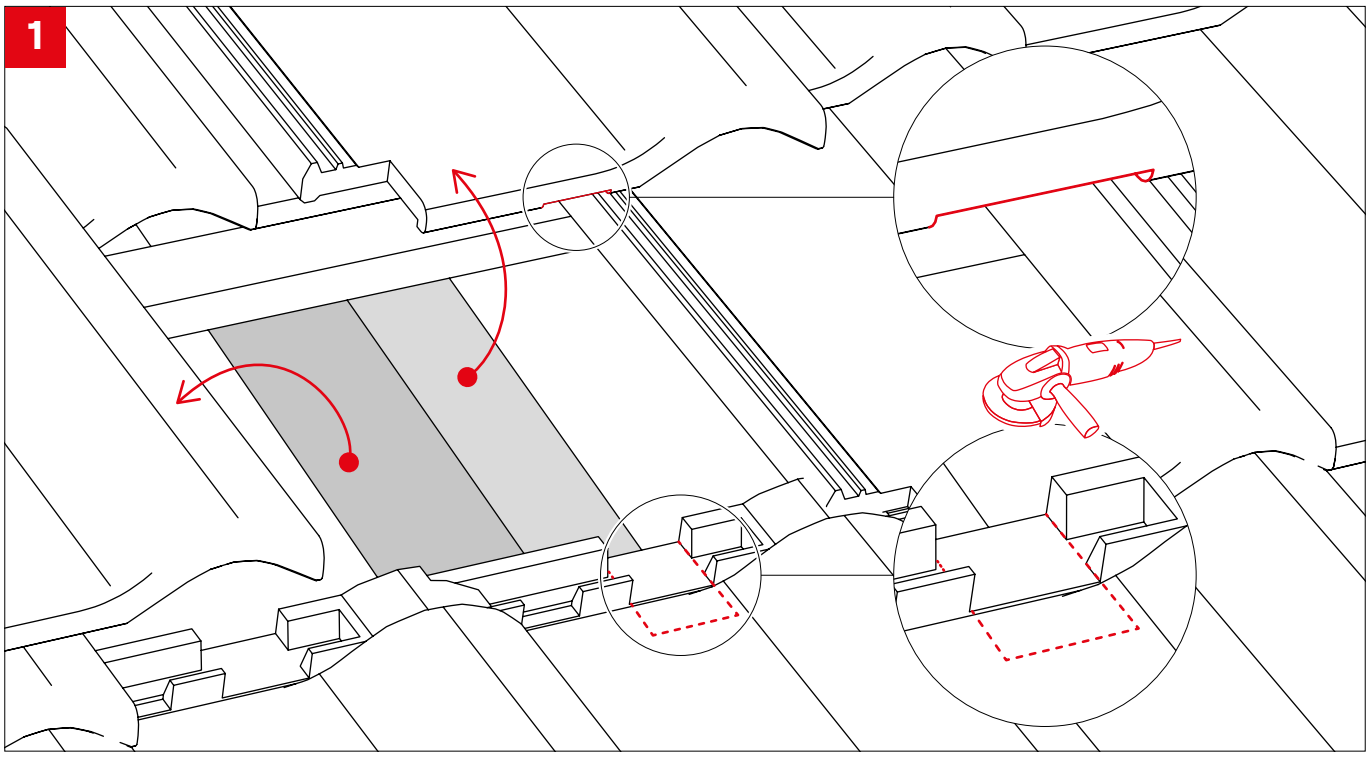

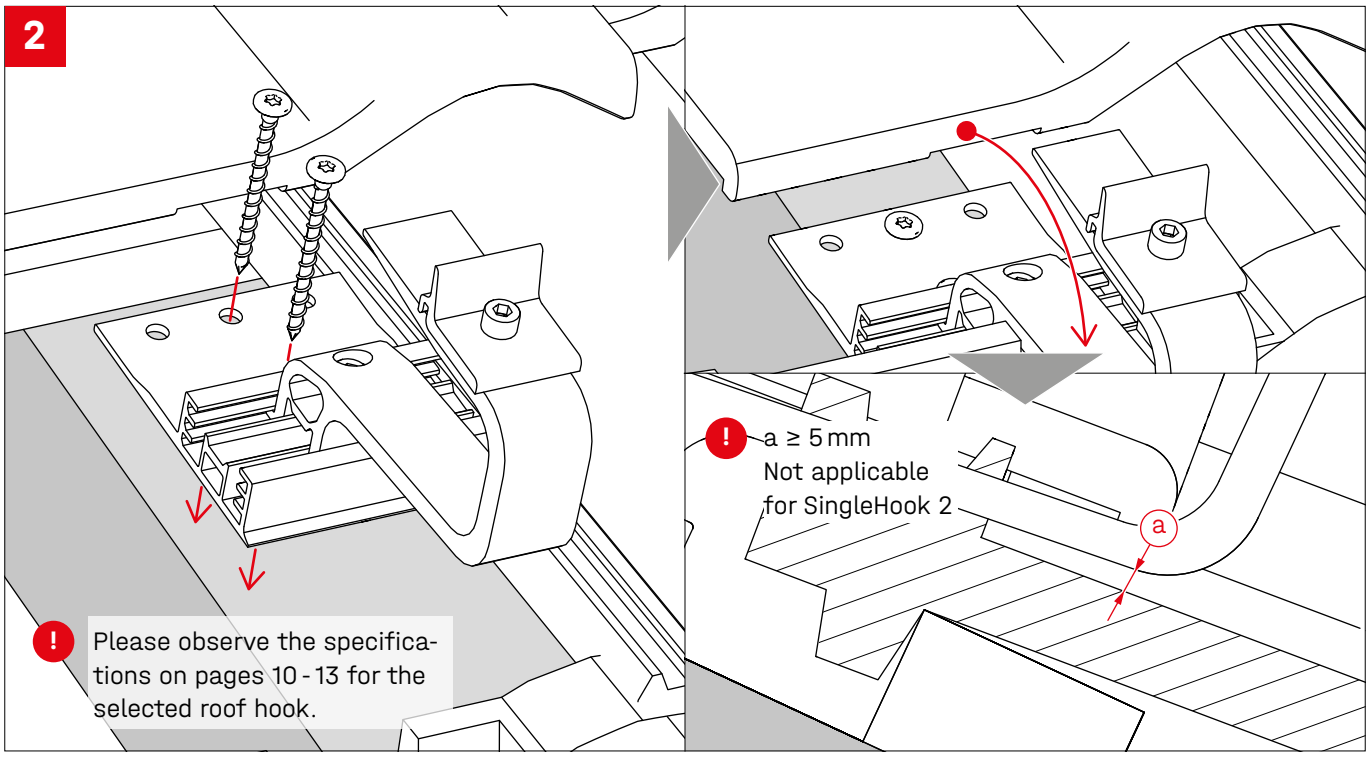


Attach BlackCover and EndCap

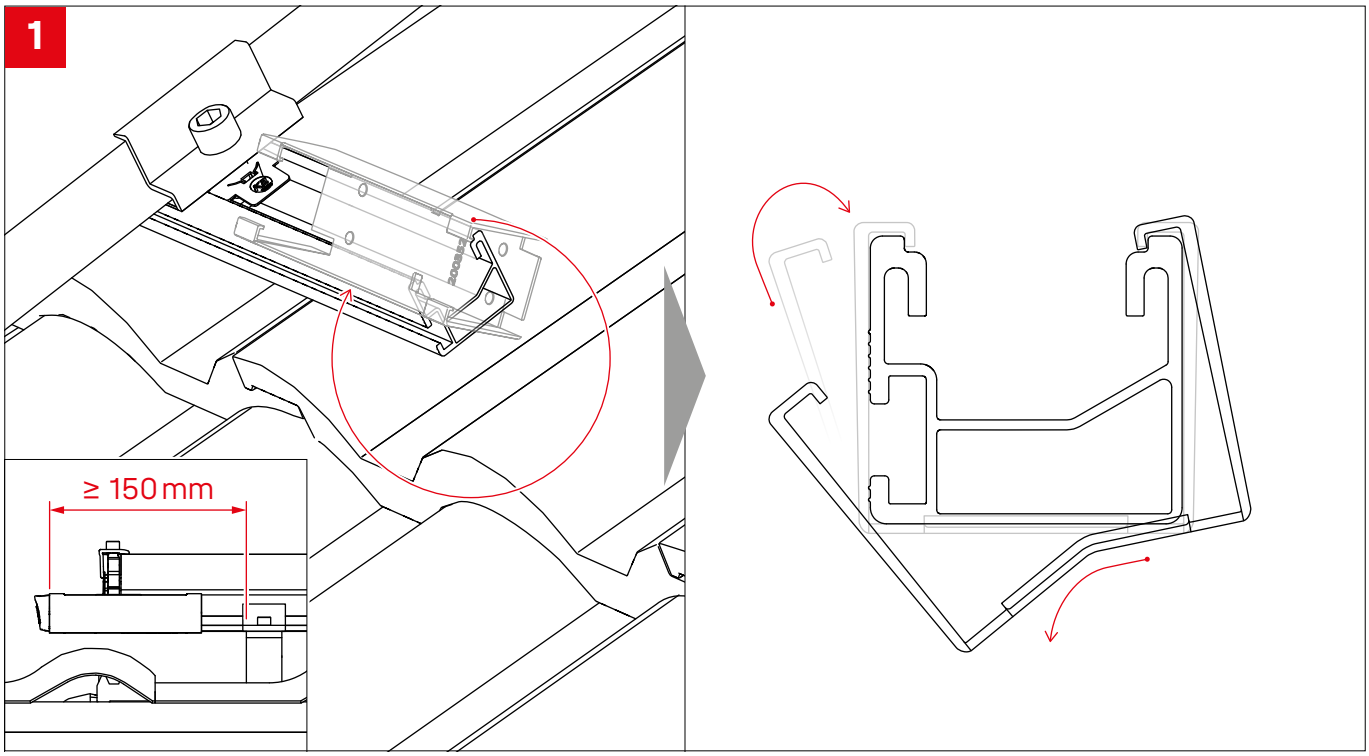

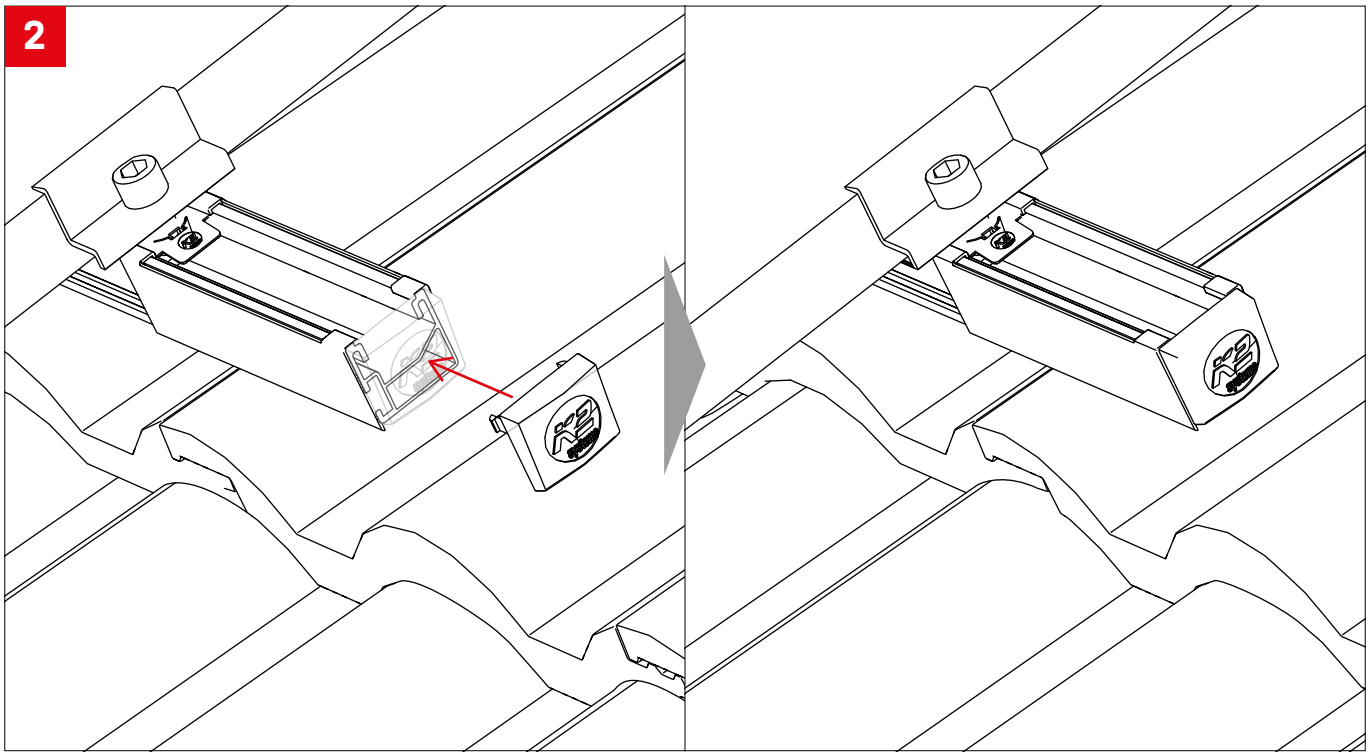

Connecting Strength

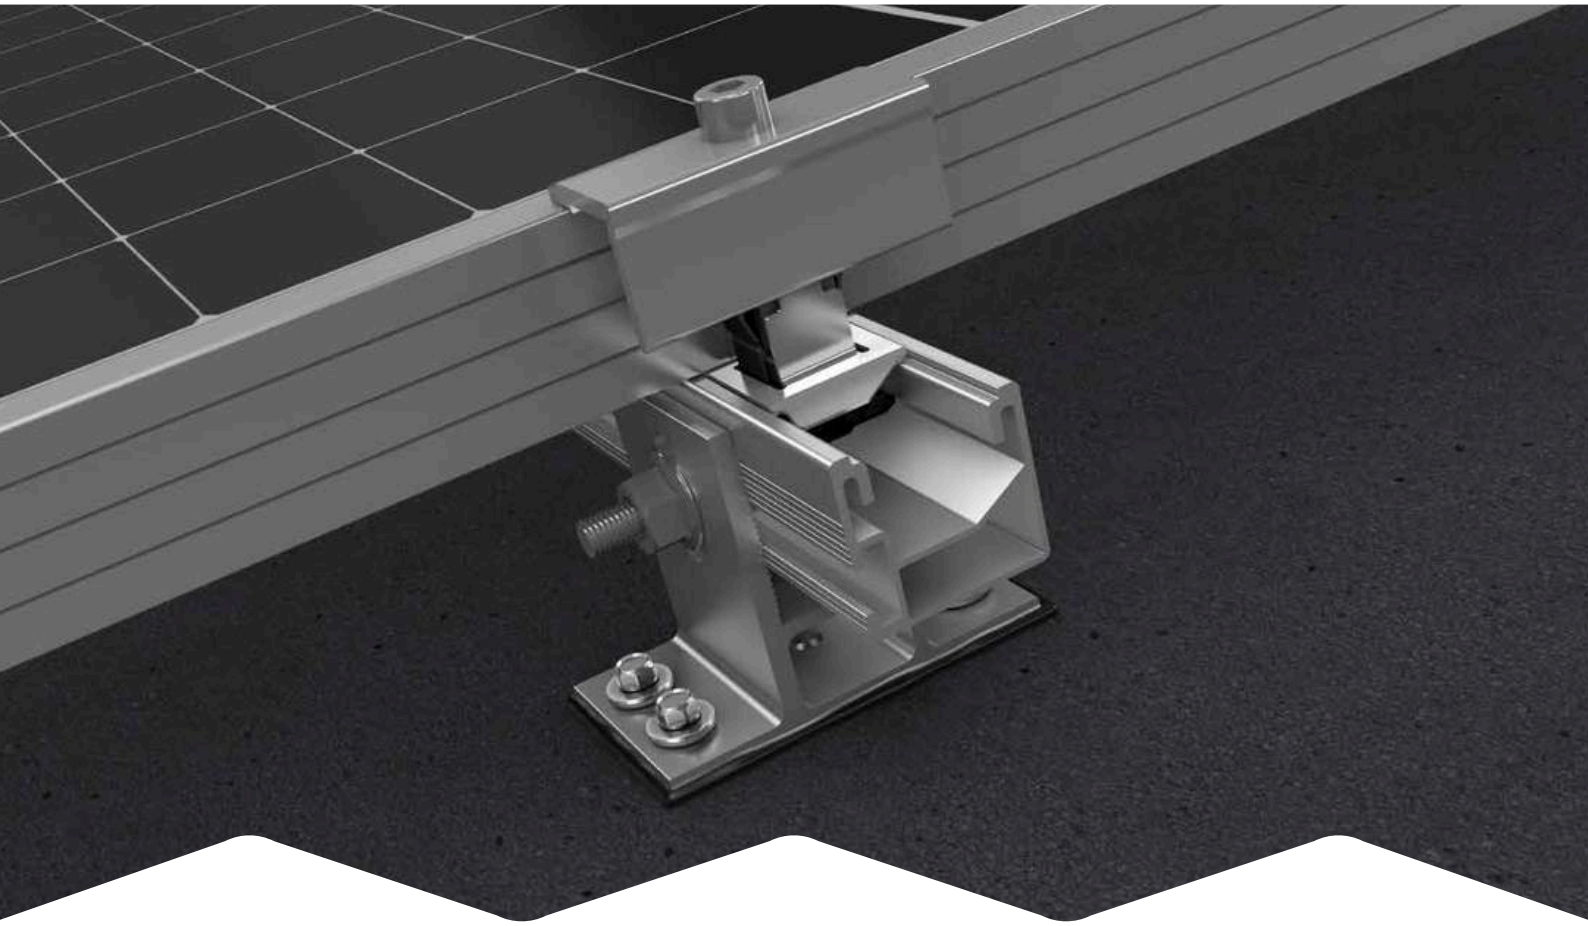

Assembly instructions

SingleRail System

with SpliceFoot

Content


- **Tools overview** 3
- **General safety information** 4
- **The following guidelines apply** 5
  - Planning with K2 Base 5
  - Roof requirements 5
  - Structural requirements 5
  - Important mounting instructions 5
- **Components** 6
- **Assembly** 8
  - Preparation 8
  - Deck attachment 9
  - Rafter attachment 10
  - Thermal separation 14
- **Module frame earthing with TerraGrif** 15
  - TerraGrif QL oder K2SZ 15

Quality tested - several certifications

K2 Systems stands for secure connections, highest quality and precision. Our customers and business partners have known that for a long time. Independent institutes have tested, confirmed and certified our capabilities and components.


Please find our quality and product certificates under:
k2-systems.com


Tools overview





SW 8 mm SW 13 mm 6 mm






6 mm



6 - 30 Nm (4.5 - 22.2 lb-ft) 6 mm



SW 13 mm



≥ 3.0 m



≥ 6.0 m

General safety information

Please note that our general mounting instructions must be followed at all times and can be viewed online at k2-systems.com.

- The equipment may only be installed and operated by qualified and adequately trained installers.
- Prior to installation, ensure that the product complies with on-site static loading requirements.
  For roof-mounted systems, the roof load-bearing capacity must always be checked.
- National and local building regulations and environmental requirements must be adhered to.
- Compliance with health and safety regulations, accident prevention guidelines and applicable standards is required.
  - Protective equipment such as safety helmet, boots and gloves must be worn.
  - Roofing works must be in accordance with roofing regulations utilising fall protection safeguards when eaves height exceeds 3 m.
  - At least two people must be present for the duration of the installation work in order to provide rapid assistance in the event of an emergency.
- K2 mounting systems are continuously developed and improved and the installation process may thereby change at any time. Prior to installation consult our website at k2-systems.com for up-to-date instructions.
  We can send you the latest version on request.
- The assembly instructions of the module manufacturer must be adhered to.
- Equipotential bonding/grounding/earthing between individual parts is to be performed according to country specific standards, as well as national laws and regulations.
- At least one copy of the assembly instructions should be available on site throughout the duration of the installation.
- Failure to adhere to our general safety and assembly instructions and not using all system components, K2 is not liable for any resulting defects or damages. We do not accept liability for any damage resulting in the use of competitor's parts. Warranty is excluded in such cases.
- German law shall apply excluding the UN Convention on CISG. Place of venue is Stuttgart. Our General Terms of Business apply.
- If all safety instructions are adhered to and the system is correctly installed, there is a product warranty entitlement of 12 years! We strongly recommend reviewing our terms of guarantee, which can be viewed at k2-systems.com.
  We will also send this information on request.
- Dismantling of the system is performed in reverse order to the assembly.
- K2 stainless steel components are available in different corrosion resistance classes. Each structure or component must be carefully checked for possible corrosion exposure.

The following guidelines apply

The SingleRail system with SpliceFoot can be used without further testing by K2 Systems in the following standard conditions. The system is also suitable for higher requirements. However, if a value exceeds the standard conditions, please contact K2 Systems.

Planning with K2 Base

We recommend our free online software K2 Base for the planning. In five steps, you can plan the right assembly system and get a construction recommendation, parts list and the structural analysis report. Simply register and start planning:
base.k2-systems.com

Roof requirements

- Bitumen sheets and Bitumen shingles
- Roof pitch regularly: 5 - 75°
- Minimum thickness for deck attachment ≥ 15 mm for OSB and ≥ 21 mm for solid wood
- Deck attachment: The resistance values are based on wood material quality of C24 (> 350 kg/m³) or for OSB ≥ 550 kg/m³
- Rafter attachment: The resistance values are based on wood material quality of C24 (> 350 kg/m³)
- Installation directly on the insulation is not possible


Structural requirements

- Sufficient holding force of the roof boarding (OSB or solid wood) on the roof structure.
- The static verification of components is automatically calculated for each location using our Base planning software

Important mounting instructions

- On-site general standards and regulations for lightning protection must be observed and consultation with a specialist to create a lightning protection concept is recommended (use lightning protection clamp if necessary).
- We recommend a thermal separation after maximum of 15 m.
- The SingleRail 36/50 RailConnector must always be positioned between two SpliceFeet; meaning, a cantilever extension at the rail edge outside the last SpliceFoot is not permitted.
- A minimum mounting distance of 50 mm from the end of the rail / rail joint to the module frame.
- Rail cut SingleRail ≥ 700 mm
- Tightening torque for all module clamps: 16 Nm
- Adhere to module manufacturer recommendations for clamping area and module installation (see module manufacturer instructions).
- The installation temperature of the SpliceFoot must be between 5 °C and 30 °C.
- The bitumen must be cleaned at the bonding point before installing the SpliceFoot.
- Do not step on the SpliceFoot or rails, as these are not climbing assists!


Components

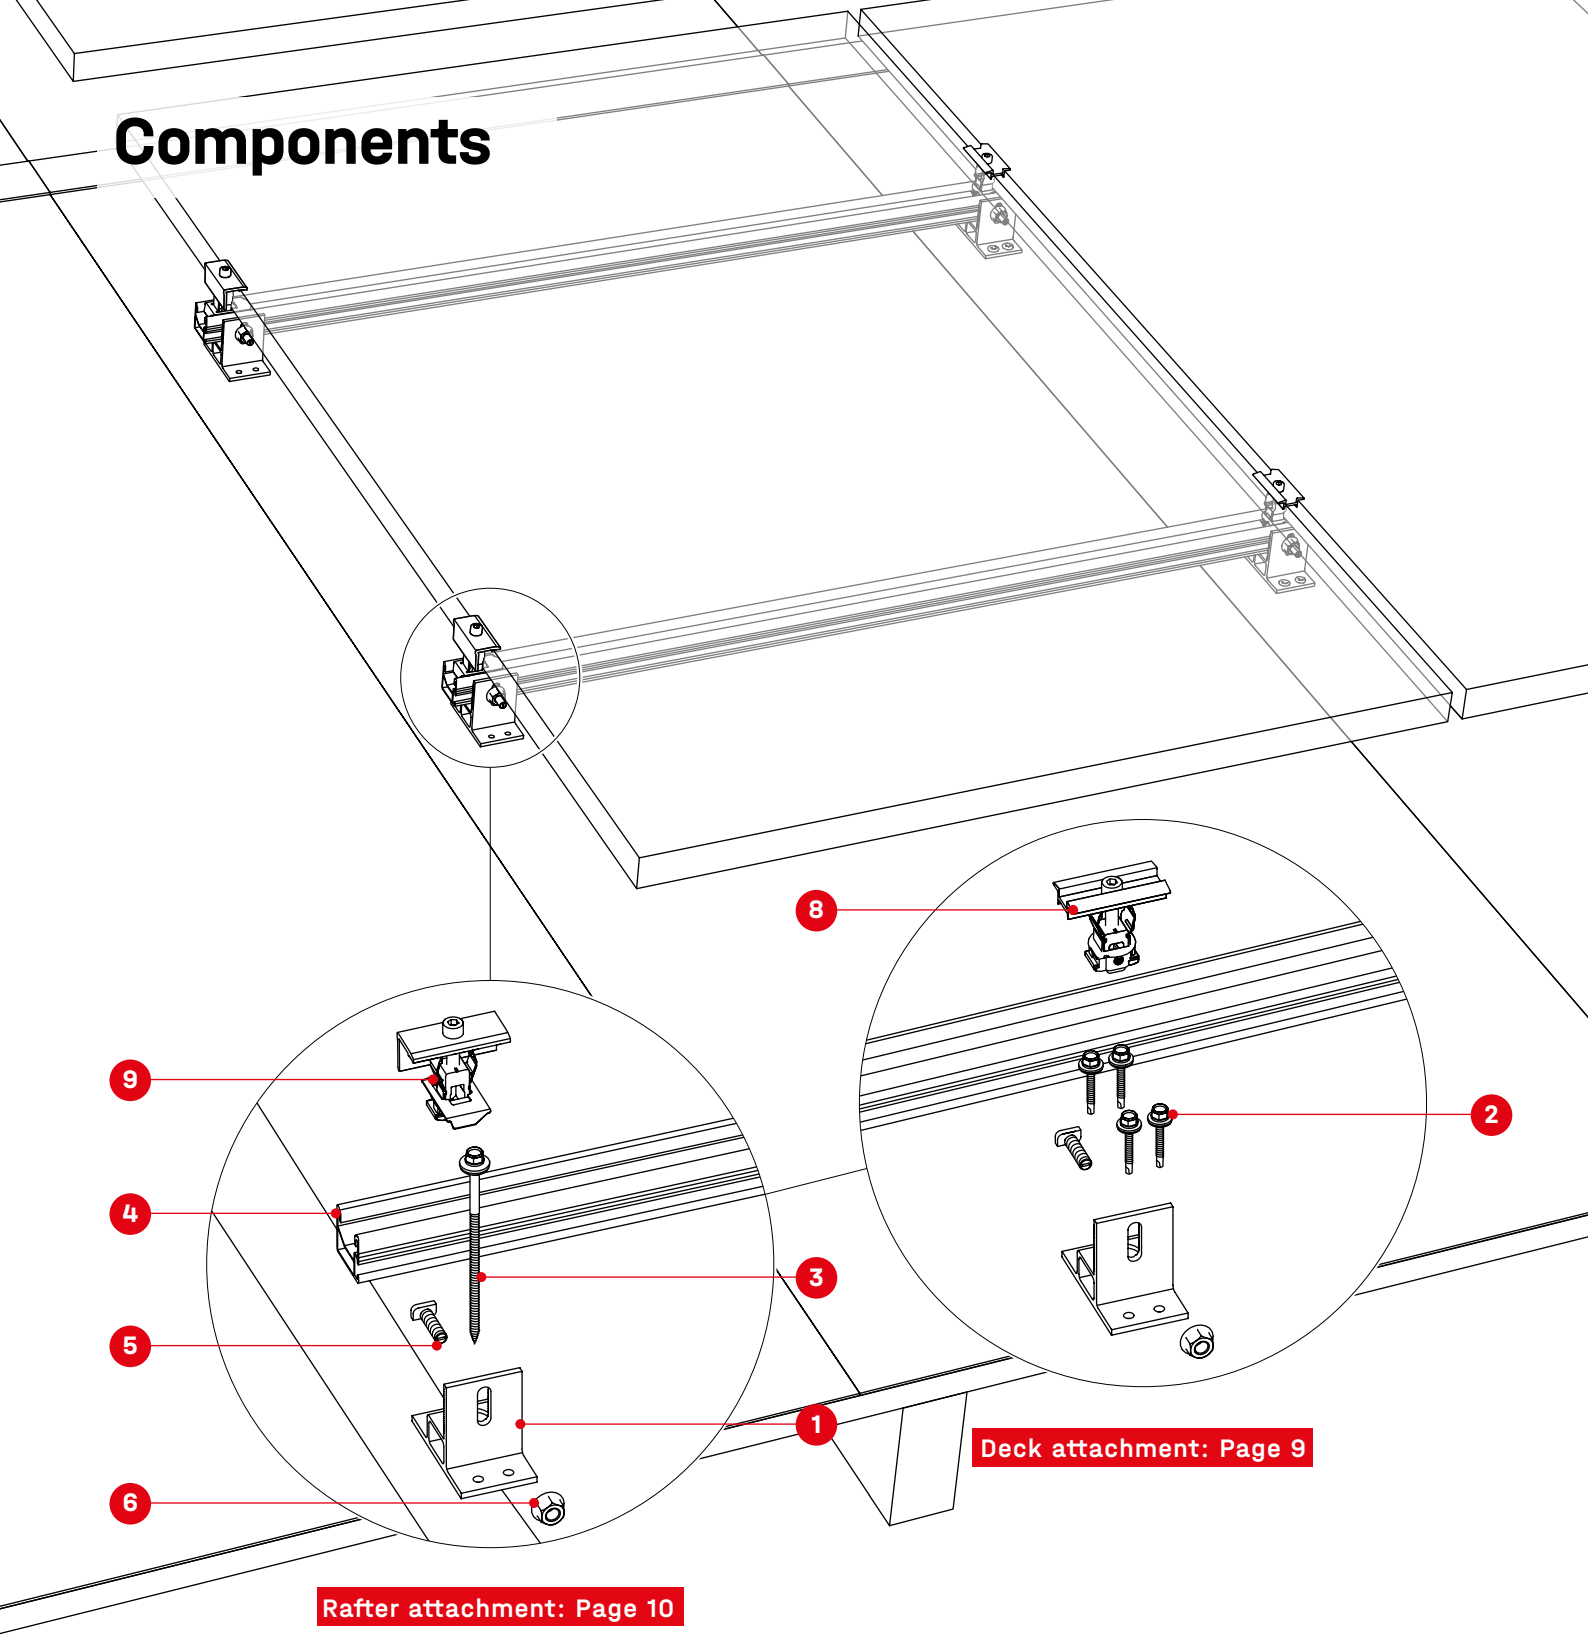

Deck attachment: Page 9

Rafter attachment: Page 10

1 2003393
SpliceFoot




2 2003064
Drilling screw
6 × 75




3 2003527
Drilling screw
6,8 × 140




4 Item no. project specific
SingleRail 36, 50 or 36 Light

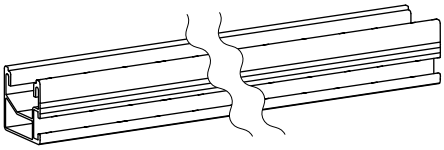

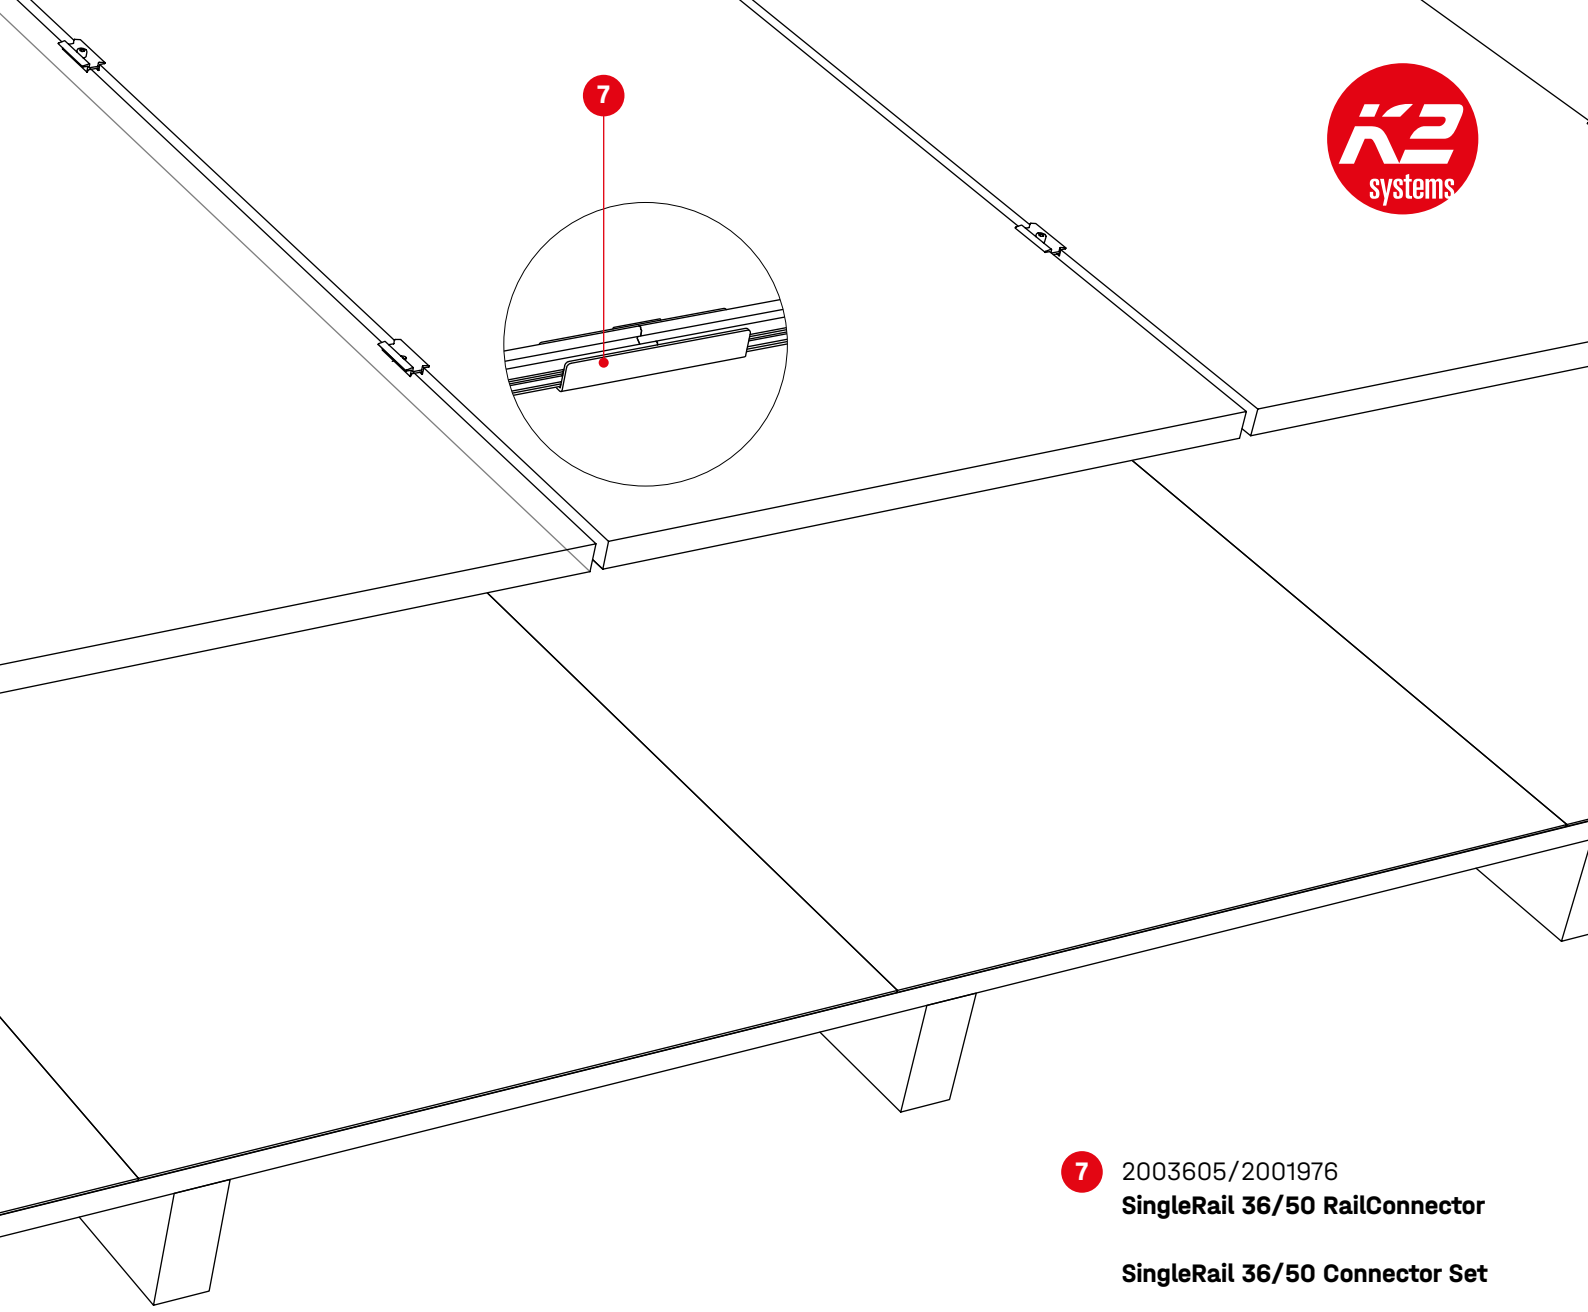

7 2003605/2001976
SingleRail 36/50 RailConnector

SingleRail 36/50 Connector Set

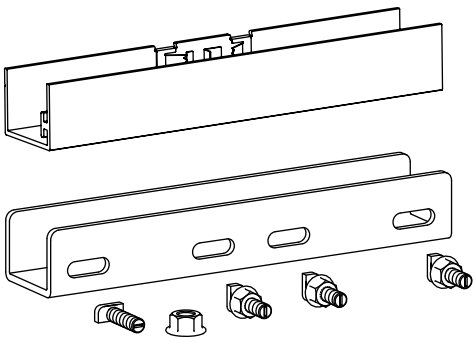

5 1002387
T-Bolt 20/12




6 1000043
Hexagon Flange nut with serration M 8




Optional

8 Item no. project specific
Module middle clamps




K2 Clamp MC
25 - 40




XS Clamp MC
30 / 33-35

9 Item no. project specific
Module end clamps



K2 Clamp EC
25 - 40



XS Clamp EC
30 / 33 / 35

2004231
TerraGrif QL



2001881
TerraGrif K2SZ



Assembly

Preparation

