
GTX5000S

5.12 kWh

LV ENERGY STORAGE

We've GOT YOU COVERED with CGL insurance.

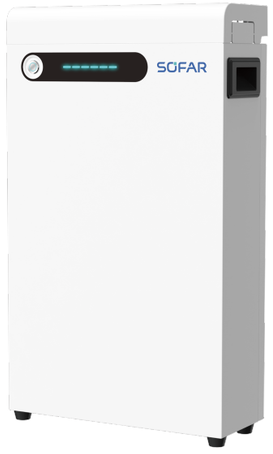

Product advantages

- Safe And Reliable LEP Battery
- Expansion of holding and parallel operation, and maximum holding and parallel operation of 4 units
- Automatic allocation of parallel ID, simple and convenient operation
- Wall mounted or floor mounted, saving installation time and cost
- Remote monitoring of data and software upgrades
- IP65 protection for outdoor installation safety



Model	GTX 5000S
System Parameters	
Battery type	LFP
Total energy	5120Wh
Usable energy	4608Wh
Rated voltage	51.2V
Operating voltage range	40.8V~57.6V
Rated charging/discharging power	2560W
Rated charging/discharging current	50A
Max. charging/discharging current	50A
Max.Parallel Quantity	4pcs
General Parameters	
Communication	CAN
Dimension (W*H*D)	396*681*154.5mm
Weight	45 kg
Protection rating	IP65
Cooling	Natural
Operating temperature	Charge: 0˚C ~ +55˚C / Discharge: -20˚C ~ +60˚C
Humidity	5%~95%
Installation	Wall-mounted / Floor stand
Max. operating altitude	2000 m
Standard	UN38.3, IEC62619, IEC62040-1, etc

*All specifications are subject to change without notice.

Hybrid Solar System

